

**PCT**WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau

## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<b>(51) International Patent Classification <sup>6</sup> :</b> <b>B44C 1/17, D06Q 1/12, B41M 5/00</b>	<b>A2</b>	<b>(11) International Publication Number:</b> <b>WO 97/33763</b> <b>(43) International Publication Date:</b> 18 September 1997 (18.09.97)
<b>(21) International Application Number:</b> PCT/US97/03804 <b>(22) International Filing Date:</b> 13 March 1997 (13.03.97)  <b>(30) Priority Data:</b> 60/013,193 13 March 1996 (13.03.96) US  <b>(71) Applicant:</b> FOTO-WEAR, INC. [US/US]; 101 Pocono Drive, Milford, PA 18337 (US).  <b>(72) Inventor:</b> HARE, Donald, S.; R.R.2, Box 389H, Hawley, PA 18428 (US).  <b>(74) Agents:</b> WEINER, Marc, S. et al.; Birch, Stewart, Kolasch & Birch, L.L.P., P.O. Box 747, Falls Church, VA 22040-0747 (US).	<b>(81) Designated States:</b> AL, AM, AT, AU, AZ, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, UZ, VN, ARIPO patent (GH, KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).  <b>Published</b> <i>Without international search report and to be republished upon receipt of that report.</i>	
<b>(54) Title:</b> APPLICATION TO FABRIC OF HEAT-ACTIVATED TRANSFERS  <b>(57) Abstract</b>  The present invention relates to a method for applying an image to a fabric, which comprises the steps of (i) hand ironing an imaged copier or printer transfer material having a support sheet and a transfer coating to a receptor element having valleys on the surface of the receptor element, (ii) peeling away the support sheet to obtain an imaged receptor element, (iii) placing a tack-free overlay sheet over the imaged receptor element, and (iv) pressing the overlay sheet by hand ironing to drive the coating into the valleys of the receptor element.		

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LJ	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

## APPLICATION TO FABRIC OF HEAT-ACTIVATED TRANSFERS }

The contents of Provisional Application U.S. Serial Number 60/013,193 filed March 13, 1996, on which the  
5 present application is based, is herein incorporated by reference.

## BACKGROUND OF THE INVENTION

The present invention relates to a method for  
applying an image to a receptor element using two  
10 heating steps.

The major user of color copiers to create  
personalized transfers are copy shops (e.g. Kinko's)  
which use commercial laser color copiers, such as the  
Canon #500/700/800 or the Xerox Spectrum. The machines  
15 cost \$30,000 and more. A commercial heat press is  
required to effect transfer.

Because a commercial press is necessary, the stores  
must also carry an inventory of apparel since the  
consumer can not shop elsewhere and apply a transfer at  
20 home. Presently, transferring images to receptor  
elements require costly machines, combined with the  
requirement for an inventory of apparel, a commercial  
and costly heat press (e.g. \$4,000+). These demands  
prevent consumers from having easy access within the  
25 course of one's everyday living experience.

For the past 20 years, transfers could only be printed at copy stores, plus a few high traffic specialty locations, such as amusement parks, tourist centers, etc. Access to these machines was limited.

5 First, not many of the copy shops would spend the \$30,000-50,000 per machine. Certainly not the smaller shops in more remote areas. Second, most frequently, T-shirt personalization is an impulse and very few people have occasion to visit copy centers frequently, or on a

10 somewhat regular basis. Third, the copy centers would be required to have at least one commercial heat press (as hand ironing was impossible), plus a variety of T-shirts in different sizes. This in-store inventory of shirts was necessary, because the imaged transfer had to

15 be pressed into the garment at the store. Fourth, copy centers have no desire to carry an assortment of apparel in differing designs and sizes.

Traditionally, copy centers in the imaging transfer business do not inventory anything other than T-shirts

20 and, on occasion, a baseball jersey and cap. The consumer had no range of choices with regard to gift items, such as pillowcases, barbecue aprons, tote bags, windbreakers, sweatshirts, etc. And certainly no range of colors.

25 Supermarkets, Drugstores, etc., find it is not cost effective to devote so many resources (i.e. costly copier, commercial press, and wide range of apparel in inventory) for the return on investment. Consequently, consumers lose because they do not have routine access

30 to obtain personally imaged apparel.

No supermarket or mass merchandiser (eg. K-Mart, Wal-Mart, etc.) has the personnel, the time, or the space to have the copier, along with compulsory commercial heat press, plus a wide range of garments.

35 However, offering the many store visitors, in high traffic locations cited above, the capability to copy a photo just being received in the store after development

of film, or a wallet photo, a prom picture, graduation picture, or simple "refrigerator art" provides a significantly better opportunity to both the consumer and the store management.

5           One problem in the art is that the internal heat of toner laser imaging devices exceeds the melt point of any "hand ironable" transfer. The problem has been apparent for 20 years when Xerox introduced its first commercial toner color copier. In 20 years, no one has  
10       found a successful method to achieve hand ironing of toner laser transfers.

          The modifications will follow description of the fundamental 20 years inability to hand iron laser toner transfers. All transfers must have a meltpoint higher  
15       than the fuser rollers within toner copiers. This meltpoint is a combination of temperature, the amount of time that the transfer is in contact with fuser roller, and pressure applied to transfer as it passes over the roller.

20           Papers are available but each can only pass through the copier with an imprinted image, and not melt when undergoing the printing procedure. However, because the meltpoint must be so high (350-400° F for 20 seconds) the transfer must be heat pressed. Should one try to  
25       hand iron, the iron would have to be, at its highest temperature, over each area, one at a time and for 20 seconds, until the 8.5"x11" or 11"x17" transfer had been completely covered with the iron for 20 seconds. On the 8.5"x11" size, it would require about eight (8)  
30       changings of the location of the iron to press the entire surface. It is inevitable that when the last position of the iron had been completed, the iron placed upon the table, and peel of transfer begun, you will often find that the first sections of those transfers  
35       which had been pressed had since cooled and the transfer must, inevitably with many current "hot peel," stick to the fabric. The consumer could never peel the transfer

from the fabric without a great deal of drag (i.e., resistance to peel). This drag would lift the piles of the fabric upward thus leaving the color unprotected at the extreme tips of the fibers. The present inventor  
5 found that if the colored coating is not compressed into the fabric, color will be significantly lost in laundering, coatings will develop cracks, feel will be rough, and colors are less vibrant.

This inability to hand iron is a universal problem  
10 today, with exceptions only in degree. Some coatings are marginally acceptable, others are not. Therefore, the restrictions for both consumer and the stores remain intact, as they have for 20 years.

#### SUMMARY OF THE INVENTION

15 An object of the present invention is to overcome the problems identified above.

The present invention improves adhesion and image quality of an image that has been transferred (e.g. imaged transfer) after it has been applied to a receptor  
20 element such as a fabric. This is achieved by re-ironing the already transferred image utilizing a material resistant to sticking (i.e. a tack resistant material such as silicone paper) between the hand-held iron and the transferred image on the receptor element.  
25 This is necessary in many, but not all, instances so as to drive the coatings which have been transferred from the support sheet of the transfer material to the receptor element (i.e. fabric) deep into the gaps and valleys of the receptor element. The repress method of  
30 the invention also compresses any loose fabric thereby making the colors more vibrant.

There are two reasons why some coatings are more significantly improved than others with a second press (re-iron):

35 1. The support sheet of some transfers are so rigid and thick as to prevent hand pressure from the

iron to drive the coatings into the gaps. If the paper is too thick or rigid, it spans the tiny gaps in the fabric and simply prevents an iron, with the energy of one's hand, to drive the coatings sufficiently into the fabric.

2. Some coatings do not melt as readily (e.g. liquify) as others when exposed to heat (and pressure). Therefore, the iron must remain at a given location for a longer period of time. As a result, the initial starting location of the iron will have cooled so as to create greater drag or resistance of peel.

In the instance of printing/copier devices which require a high degree of internal heat, coatings must have a melt point so high as to exceed that of the printer. The higher the melt point the higher the temperature that is required for release. The higher the temperature, the greater the drag because the initial positions have cooled to varying degrees. As a result, the coatings will simply rest atop the fabric and span crevices rather than follow the texture and fill the gaps.

Reasons for the necessity of either a rigid support or higher melt point coatings are:

1. Many cassette feeders require a stiffer paper to avoid jamming.

2. Some copiers/printers require stiffer paper to avoid jamming as the paper passes through the various internal processes. In those instances, a more pliable support sheet will get "hung up" at certain junctions and create an unacceptable incidence of jamming.

3. As previously mentioned, some coatings require a formula which results in a higher melt point to avoid activating and wreaking havoc with the interior of the device.

Those coatings with higher melt points will not flow into the valleys of the fabric with the pressure of only a hand iron. Presently, the only method in the art to achieve adequate transfer from support sheet to

fabric of the imaged coatings is with the use of a commercial heat press. The repress method of the present invention overcomes the problem in the art.

5 A hand-ironable transfer would enable many locations, which currently do not offer Personalized Apparel services because of the many restrictions, to provide this service and enjoy a profit.

10 Thus, in one embodiment of the invention, the consumer would simply have a copy (i.e. color) made of a photo or artwork (e.g. greeting cards) onto a hand ironable transfer material. Then he/she could shop for the specific receptor element of preference, varying from pillowcases, aprons, nite/beach/baseball jerseys, t-shirts, etc. upon which to transfer the image (i.e. an  
15 imaged transfer) in accordance with the process of the present invention.

#### BRIEF DESCRIPTION OF THE DRAWINGS

The present invention will become more fully understood from the detailed description given  
20 hereinbelow and the accompanying drawings which are given by way of illustration only, and thus, are not limitative of the present invention, and wherein:

FIG. 1 is a cross-sectional view of a transfer material using CYCOLOR technology which may be used in  
25 the claimed process; and

FIG. 2 illustrates the first of two ironing steps for ironing an image onto a tee shirt or the like.

#### DETAILED DESCRIPTION OF THE INVENTION

With the present invention, the consumer could copy  
30 or reproduce the image of his/her choice onto known transfer products, shop for the best receptor element such as an apparel of choice, and iron the transfer to a garment at home. Thousands of hitherto unavailable locations could now provide the capability to consumers  
35 to personalize apparel for giving or wearing. These



many new locations would enjoy a significant new profit opportunity, with a minimum investment in space, personnel, and assorted apparel.

5 The advantages of "Hot Peel Transfers" of the present invention:

1. Laser copiers could be located in supermarkets, super drug stores, mass merchandisers, etc.

2. Millions of consumers, worldwide, can copy beautiful color images for transfer to fabric at home.

10 The present invention(s) enable consumers to hand iron transfers to fabric, thus allowing for the benefits herein mentioned.

A fabric consists of peaks and valleys. The degree of both are determined by the diameter of the fiber and the tightness of the weave. A fine fiber, tightly  
15 woven, will have many fewer valleys and of lesser depth than a heavier yarn loosely woven. As a result of this uneven surface, a burden is placed upon the transfer coatings (i.e. carrier material which is capable of both  
20 release and adhesion, plus the image). They must be driven into the valleys as well as cover the surface of the strands to prevent or at least reduce cracking of the surface after the transfer has been applied. A commercial heat press has sufficient pressure to drive  
25 the coatings deeply into the valleys of the fabric. A hand iron does not.

The reason that the hand iron is not sufficient to drive the coatings into the valleys is that the support sheet is sufficiently rigid to resist the hand pressure.  
30 As a result, the coatings actually "span" the valleys rather than penetrate into them.

The reasons why it is imperative not to allow the coatings to merely rest upon the fabric surface are:

1. Stress cracks will appear as the garment is  
35 worn.

2. Washability is minimized and colors are destined to fade significantly after only 2-5 washings.

When coatings are properly integrated into the fabric, one can expect a minimum of 25 washings, and, more often than not, well above 50.

3. The stiffness is objectionable. "HAND" as it is referred to within the imprinted sportswear industry, is of extreme importance to consumers. Softness is a major consideration.

4. Colors should be vivid. When the support sheet is peeled from the fabric after having been hand ironed, the tiny fabric tips tend to "lift", rather than remain condensed as they would with a heat press.

It first appears as though color has been lost, but after re-pressing, the intensity of color improves markedly.

15 The re-press method enables one to use a copier such as the family Canon Laser Copiers wherever it is available, in order to copy or print the desired image onto a transfer material at a retail location and hand iron the personalized imaged transfers at home.

20 Although the melt point must be high and the paper rigid so as to prevent excessive jamming, the consumer can iron small sections at a time and peel at maximum heat. By doing small sections (e.g. 3 X 4) one can work his/her way over the entire transfer, one small area after another, and peel the support sheet before it begins to cool.

The more it cools, the greater the resistance between the coatings and the support sheet. The greater the pull of paper (i.e. resistance), the less the gaps will be filled. The consequences are defined above. However, by ironing in small sections to minimize resistance, and then re-ironing, one can drive the coatings with highest melt points and stiffest of support sheets deeply into the fabric.

35 The re-pressing with a hand iron is beneficial, even necessary, in many situations, as described above.

Existing transfer materials therefore provide an adequate transfer of most of the desired image to the receptor element. However, in order to ensure the transfer of all or substantially all of the desired  
5 image to the receptor element without the above-mentioned shortfalls of quality and protection, the present inventor recognized that an additional heating step after transfer would be useful in improving the home imaged transfer process.

10 Therefore, the use of a non-stick, tack-free overlay sheet, such as a silicone sheet, provides a distinct advantage because it is considerably less rigid than the original support for the transfer material and the consumer can apply pressure for a much longer time.  
15 The additional time is made possible because the coatings do not stick to the non-stick, tack-free overlay sheet (e.g. silicone paper) and the consumer does not have to worry about spending additional pressing time which would otherwise result in excessive  
20 adhesion or drag of support sheet to receptor surface.

It is imperative that an overlay sheet is placed over the imaged fabric before contact with the iron is made in the re-pressing process. If not, the coatings would simply activate (e.g. remelt) and adhere to the  
25 iron. The garment would be ruined. An overlay sheet must be made of a material which resists "sticking" of the transferred image thereto so as to prevent remelted coatings from sticking to the re-press sheet. Treated papers, such as teflon or silicone, are some examples of  
30 stick-resistant re-press papers (e.g. overlay sheets). With use of a non-stick, tack-free overlay sheet, one can apply full body weight for as long as a minute or more, but most commonly at about 15 seconds per position of the iron at the maximum iron temperature. This  
35 drives the coatings deeply into the fabric and compresses any loose fabric. The receptor element is allowed to cool for a minute or so, and the overlay is

peeled with no resistance. No coatings will have adhered to the overlay sheet and a vivid, soft, highly washable, and crack-resistant image will remain on the item of the consumer's choice.

5           Because of the use of a hand iron for home application of the transfer, the consumer is not "locked" into the very narrow choice of apparel in the very few locations where the transfer copy service is currently available. The consumer can simply copy the  
10       desired image onto conventional transfer material, select from a wide variety of fabric garments readily available in retail stores and, by utilizing the method of the invention, apply transfer at home without the problems identified above (i.e. incomplete transfer).

15           The tack-resistant and stick-resistant overlay, such as commercially available silicone paper, could be included in a kit along with a conventional transfer material and ironing instructions and provided to the consumer in a small bag for home application. This kit  
20       could be purchased and the transfer material could be imaged by conventional means such as by copying or printing either at a business having a copier or printer or at home (with a personal computer and printer) thereby providing an imaged transfer material. The  
25       image is then transferred according to the process of the present invention.

          The use of a non-stick overlay allows for a quality transfer created by a larger selection of color imaging devices found in a vast assortment of readily accessible  
30       locations. Consumers will have new opportunities to wear and give personalized items. They will not be limited to a select few stores (copy - centers primarily), a very limited selection of items, primarily white t-shirts, and will also enjoy a considerably  
35       reduced price.

          For example, copy-centers have a captive audience. The consumer must choose the items which the store

offers because it must be pressed on site. The store gets what the traffic will bear for a "finished product" (e.g. \$12.00-\$14.95 in 1997 dollars is an accurate average for a personalized t-shirt). With the ability  
5 to iron at home made possible by the overlay and re-press method of the invention, the consumer needs only copy (i.e. color) the desired image onto a transfer material (\$3.95-\$5.95) and transfer the image to a T-shirt (\$3.50). The savings on an imaged T-shirt would  
10 minimally approximate \$5.00. One could have a personalized sweatshirt, nite-shirt, or nylon windbreaker for the same, or slightly higher, than the current average cost for a T-shirt. Therefore, the overlay and re-press method provides for the consumer  
15 greater access, lower prices, and much greater selection of personalized items.

Although commercially available silicone paper is the preferred material for use in the second heating step of the invention, other similar materials may be  
20 used. For instance, if tackiness or stickiness is not an extremely severe problem, bond paper, wax paper, or butcher paper may be substituted for the silicone paper. The amount of anti-stick property of the overlay sheet depends on the tackiness of the transfer material which  
25 is selected. The choice of suitable non-stick overlay sheets is therefor readily determined by one of ordinary skill in the art.

The preferred procedure of the invention is as follows:

- 30 1. Hand ironing the rear surface of the imaged transfer material in order to transfer the image to fabric and peeling away the support sheet. (The imaged transfer material comprises (i) a support, a transfer layer capable of release without water and capable of  
35 providing adhesion, and an image receptive layer, or (ii) a support and a combined transfer/image receptive

layer. Separate surface adhesives are entirely unnecessary.)

2. Placing a thin silicone sheet over the imaged fabric (i.e. imaged transfer) and pressing with a hand held iron to drive the coatings into the valleys of the fabric.

When the silicone sheet is pressed with the iron over the coatings immediately after the original transfer had been applied, it gives the fabric a softer feel because it has filled the voids in the fabric and significantly reduces cracking of the surface because the voids are not spanned but rather filled.

Because the coatings have been compressed more so with the silicone than without, the colors are significantly more resistant to laundering than they would otherwise be.

After fabric which has received a transferred image and has been laundered several times, the fibers of said fabric begin to lift. The result is the appearance of a color loss which in fact, is not a true loss as much as it is the appearance of the loss because the fibers are no longer as condensed or compressed as they had originally been immediately subsequent to transfer. The invention re-condenses the fibers, thus restoring the original vibrancy of the colors. Thus, the process of the invention can be used on an aged or previously used imaged receptor element such as fabric in order to restore the color of the original image.

The overlay sheet (e.g. silicone sheet) can be reused to infinity because nothing adheres to it. Therefore, after multiple washings have created the appearance of color loss, the color vibrancy can be regained by simply placing the silicone sheet over the imaged area and repressing the fibers, thus condensing the fabric. The result will be a return to something very close to the original color. This process can be

repeated and repeated after multiple washings and each time the vibrancy of the color will be regained.

The receptor element may be any desired receiver, such as textile, leather, ceramic, wool, glass, plastic or even metal having pores (i.e. metal sign). Preferably, the receptor element is a shirt, tee shirt or the like. Other suitable receptor surfaces include canvas, paper, or receptor supports used by the museum or conservatory industry. However, any receptor capable of receiving the imaging material (e.g. image and non-image areas) of the transfer material or imaging sheet and imparting the desired washproof properties is within the scope of the invention.

Energy applied to the rear surface of the element is by heat and/or pressure via ironing with a hand held iron as opposed to a commercial heat press. The dry release transfer materials of the invention (as opposed to wet release materials) are preferably capable of receiving images from color laser copiers and/or printers. However, they are equally capable of receiving images from color ink jet printers or from black and white printers. Other commercially available copiers or printers that may image the transfer materials utilized in the present invention include thermal wax ribbon printers/copiers such as Seiko 5401, Sharp CX 5000 model color copier and Toshiba 5400 model. Panasonic, Fargo, Cal Comp and Mitsubishi also manufacture thermal ribbon printers and/or copiers which may be used.

As stated above, the invention is applicable to transfer paper currently utilized in laser printing. The most popular models and the ones typically used for fabric transfers are Canon Laser copiers 500, 600, 700 and 800 models.

The invention is further applicable to transfer paper currently utilized in ink jet printing. For instance, CANON has a well known Bubble Jet line of

transfer products that may be utilized in their printers. Other manufacturers of Ink Jet copiers and/or printers include Hewlett-Packard, Epson, Xerox, Lexmark, Mannesman Tally and Hitachi.

5        Basically, any known or future developed copier or printer that is able to image a transfer material may be used.

Most preferably, the process of the invention takes place in the absence of steam.

10        Further, the process of the present invention operates in the pressure range that the typical user may apply by pressing with a conventional hand held iron present in virtually every household in the United States. The process of the invention preferably  
15        excludes pressures attainable with commercially available heat press equipment. Indeed, with the advent of transfer materials for home use (i.e. where there are no commercial heat presses), the inventor observed a problem not previously known in the art and the solution  
20        thereto. That is, the problem addressed by the present inventor was a result of home use of transfer products and processes that presently are most successfully commercially conducted. In the absence of commercial equipment in the home, the inventor found the solution  
25        to the problem of incomplete transfer of the desired image. More specifically, the consumer was not able to provide enough pressure during the home transfer process as compared to the use of commercial heat press equipment, sometimes resulting in a less than perfect  
30        transfer. The present inventor overcame this problem.

One requirement of a suitable transfer coating of the invention is that it adhere strongly to fibrous supports, and optionally to glassy supports.

35        The transfer carrier layer in the transfer material used in the invention must also be capable of transfer from the support (e.g. imaging sheet) and adherence to a receptor support without the requirement of a separate



surface adhesive layer. Without being bound by any theory, upon back surface heating of the support, the carrier would undergo a solid to solution phase transition resulting in a transfer to the receiving layer. Edge to edge adhesion, to the receiving layer, would occur upon cooling of the carrier onto the receiving layer. Upon cooling, an image layer would be completely transferred onto the receiving layer with an excess of carrier providing mechanical and thermal stability, as well as washability.

The transfer carrier layer of the transfer material should provide a colorfast image (e.g. washproof or wash resistant) when transferred to the receptor surface. That is, upon washing the receptor element (e.g. tee shirt), the image should remain intact on the receptor element.

Suitable transfer materials include the compositions from U.S. Patent Nos. 5,501,902, 5,271,990 and 5,242,739. The contents of U.S. Patent Nos. 5,501,902, 5,271,990 and 5,242,739 are herein incorporated by reference.

The present invention is most preferably directed to the use of dry transfer materials known in the art such as described in U.S. Patent Nos. 5,501,902, 5,271,990 and 5,242,739. That is, dry release transfer materials *per se* are well known in the art, and any suitable dry release transfer material may be used in the invention. More specifically, the preferred dry release transfer materials of the present invention do not contain a water soluble material for wet release.

Canon creative products T-Shirt Transfers TR-101 may be used. Other suitable transfer materials include those described in U.S. Patent Nos. 4,773,953 and 4,980,224 including a transfer sheet known as "TRANSEEZE" manufactured by Kimberly-Clark Corporation or any other commercially available transfer sheet which has a substrate with a coating which is transferable to

a receptor sheet upon the application of heat or pressure to the back of the substrate, and that is coated with, for instance, Singapore Dammar Resin. The image-receptive heat transfer papers of U.S. Patent Nos. 5,501,902, 5,271,990, and 5,242,739 may also be used. These papers generally have at least one film layer comprised of a thermoplastic polymer on a support. Also, Cycolor transfer materials as disclosed U.S. Patent Nos. 5,139,917 and 5,236,801 and Provisional Application Serial No. 60/030,933 filed November 15, 1996, entitled "Imaging Transfer System and Process for Transferring Image and Non-Image Areas Thereof to Receptor Element" to Donald S. Hare may be used, or silver halide transfer materials as disclosed in copending applications U.S. Serial Nos. 08/659,700 and 08/479,409 and Provisional Application Serial No. 60/029,917 filed November 4, 1996, entitled "Silver Halide Photographic Material and Method of Applying a Photographic Image to a Receptor Element" to Donald S. Hare and Scott A. Williams may be used. Common among all of these transfer materials is a carrier material which is capable of both dry release and adhesion.

Suitable dry release transfer materials may comprise (i) any known suitable support in the field of transfer materials (i.e. paper, plastic coated papers, PET resins, etc.), and (ii) coated on the support a release/transfer material (e.g. carrier) that is capable of receiving an image thereon (i.e. via photocopying or printing) such as Singapore Dammar resin, Batavia Dammar resin, accroide (yucca) resin, East India resins, Kauri resins, Manila resins, pontianak, and acrylics.

The invention is preferably applicable to printers or copiers that can handle a transfer sheet. That is, the invention is applicable to use in, for instance, ink jet printers and copiers, thermal wax ribbon printers and copiers, laser toner copiers, Canon color laser copiers, etc. Whenever the transfer is used and it is

necessary to drive the transfer image into the valleys of the receptor sheet, the process of the present invention should be used. The process of the invention fills the valleys of the receptor element, thereby  
5 filling the voids left by the initial transfer. This additional heating step prevents cracking of the transferred image and improved launderability. By using a second heat step with a second sheet (i.e. commercially available silicone paper) that is generally  
10 softer and less rigid than, for instance, the original paper backing of the original transfer material, the image is transferred into the receptor element (i.e. textile) providing the final product with a more compliant feel. The process of the invention should not  
15 be used with copiers/printers that overheat the transfer material (i.e. heating above the melting point of the transfer carrier) during the imaging stage.

Another embodiment of the invention relates to cold peel, as follows:

- 20 1. A base paper for the coatings.
2. The inside of the base paper, that which will be in contact with the coatings, must be of an easy release such as silicone. This will allow for easy peeling of support sheet (i.e. silicone) from coatings  
25 before ironing of transfer.
3. After the coatings, with support sheet have passed through the copier, the silicone support is peeled from the coatings.
4. The coatings, now appearing as a "film" rather  
30 than a full bodied transfer, are placed into position atop the fabric.
5. A silicone sheet is then placed directly over the coatings (film).
6. Set the iron to "hottest" and press the  
35 coatings, protected by the silicone sheet, into the fabric. The "ironer" can press as firmly and for as

long as he/she chooses, in each position. Recommend 20 seconds at each of 8 positions.

7. After last position has been pressed, one or two passes should be made over the entire surface to press down the areas in the surface of the iron where the steam holes are located.

An easy and complete peel of paper will result.

The cause for the ease and totality of the paper release is the result of the coatings first having been removed from the support sheet which had to have been thicker, more steady, and a restriction of heat permeability to carry the coatings then the printing process.

Once the coatings were removed from this support sheet, a silicone (thin sheet placed over this film), one could iron for a full 20 seconds, (or longer if needed), the surface circled with the iron after the pressing. It makes no difference if the first positions have cooled, because it is desirable for the entire surface to cool. The silicone sheet, used to protect coatings from surface of iron, release easily and completely from coatings when cold. This is in contrast from transfers in existence today which must be peeled hot. This is impossible to do with a hand iron because first positions of iron will have cooled by time last position has been pressed.

Methods of transferring an image to a receptor element are also disclosed in the above-mentioned patents. That is, the transfer materials per se utilized in the present invention are known in the art, as are methods for transferring the images to the receptor element using a single heat transfer step.

The amount of time needed to press the non-stick, non-tacky sheet with a hand iron in order to press the transfer coating into valleys of the receptor element varies depending on the success of the initial transfer and the temperature of the iron. The amount of time for

repress is that which is necessary to drive the coating into the receptor element or alternatively to condense the fibers to restore color vibrancy. For example, the time that the iron is placed over a specific area that the iron covers may be anywhere from 5 seconds to 90 seconds, preferably from 8 seconds to 60 seconds, and more preferably from 15 to 30 seconds per position. The iron may be repositioned in consecutive order until the area that the transfer covers has been pressed in its entirety.

The invention is applicable to the following transfer materials. However, the invention is not limited to the following transfer materials.

IMAGE RECEPTIVE HEAT TRANSFER PAPERS OF U.S. PATENT NO. 5,271,990

The process of the present invention is further applicable to the image receptive heat transfer materials of U.S. Patent No. 5,271,990. For instance, the present invention also relates to a method of transferring image and non-image areas to a receptor element which comprises the steps of:

(a) placing an image on an image-receptive heat transfer material (i.e., by thermal ribbon printers, impact ribbon printers, dot matrix printers, crayons, printing or copying with a photocopier) which comprises:

a flexible cellulosic nonwoven web base sheet having top and bottom surfaces,

an image-receptive melt-transfer film layer overlaying the top surface of said base sheet, which image-receptive melt-transfer film layer is comprised of a thermoplastic polymer selected from the group consisting of polyolefins, polyesters, and ethylene-vinyl acetate copolymers and which melts in the range of from about 65 to about 180 degrees Celsius, in which the exposed surface of said image-receptive melt-transfer layer has a smoothness value, independent of the

smoothness of the base sheet, of at least about 10 cc/minute as measured by a Sheffield Smoothness Tester,

(b) positioning the top or front surface of the transfer material having the image thereon against a receptor element,

(c) applying heat to the rear or bottom surface of the transfer material having the image thereon to transfer the image and non-image area to the receptor element,

(d) peeling away the support to obtain an imaged receptor element such as a fabric,

(e) placing a non-stick or tack free overlay sheet (e.g. thin silicone sheet) over the imaged receptor element such as a fabric, and

(f) pressing the overlay sheet (e.g. silicone sheet) by hand ironing to drive the coating into the fabric and removing the overlay sheet.

The present invention also relates to a method of transferring image and non-image areas to a receptor element which comprises the steps of:

(a) placing an image on an image-receptive heat transfer material (e.g. by thermal ribbon printers, impact ribbon printers, laser printers, dot matrix printers, crayons, or copying with a photocopier), which comprises:

a flexible cellulosic nonwoven web base sheet having top and bottom surfaces,

a melt extruded, melt-transfer film layer overlaying the top surface of said base sheet, which melt transfer film layer is comprised of a first thermoplastic polymer selected from the group consisting of polyolefins, polyesters, and ethylene-vinyl acetate copolymers, ethylene-methacrylic acid copolymers, and ethylene-acrylic acid copolymers and which melts in the range of from about 65 to about 180 degrees Celsius, and

a melt-extruded, image receptive film layer overlaying said melt-transfer layer, which image-

receptive film layer is comprised of a second thermoplastic polymer selected from the group consisting of polyolefins, polyesters, and ethylene-vinyl acetate copolymers and which melts in the range of from about 65  
5 to about 180 degrees Celsius, in which the exposed surface of said image-receptive film layer has a smoothness value, independent of the smoothness of the base sheet, of at least about 10 cc/minute as measured by a Sheffield Smoothness Tester,

10 (b) positioning the top or front surface of the transfer material having the image thereon against a receptor element,

(c) applying heat to the rear or bottom surface of the transfer material having the image thereon to  
15 transfer the image and non-image area to the receptor element,

(d) peeling away the support to obtain an imaged receptor element such as a fabric,

(e) placing a non-stick or tack-free overlay sheet  
20 (e.g. thin silicone sheet) over the imaged receptor element such as a fabric, and

(f) pressing the overlay sheet (e.g. silicone sheet) by hand ironing to drive the coating into the fabric and removing the overlay sheet.

25 IMAGE RECEPTIVE HEAT TRANSFER PAPERS OF U.S. PATENT NO. 5,242,739

The process of the present invention is further applicable to the image receptive heat transfer materials of U.S. Patent No. 5,242,739. For instance,  
30 the present invention also relates to a method of transferring image and non-image areas to a receptor element which comprises the steps of:

(a) placing an image on an image-receptive heat transfer material (e.g. by thermal ribbon printers,  
35 impact ribbon printers, laser printers, dot matrix

printers, crayons, or copying with a photocopier), which comprises:

a flexible cellulosic nonwoven web base sheet having top and bottom surfaces,

5 an image-receptive melt-transfer film layer overlaying the top surface of said base sheet, which image-receptive melt-transfer film layer comprises about 15 to about 80 percent by weight of a film-forming binder selected from the group consisting of ethylene-  
10 acrylic acid copolymers, polyolefins, and waxes and from about 85 to about 20 percent by weight of a powdered thermoplastic polymer selected from the group consisting of polyolefins, polyesters, polyamides, waxes, epoxy polymers, ethylene-acrylic acid copolymers, and  
15 ethylene-vinyl acetate copolymers, wherein each of said film-forming binder and said powdered thermoplastic polymer melts in the range of from about 65°C to about 180 degrees Celsius and said powdered thermoplastic polymer consists of particles which are from about 2 to  
20 about 50 micrometers in diameter,

(b) positioning the top or front surface of the transfer material having the image thereon against a receptor element,

(c) applying heat to the rear or bottom surface of  
25 the transfer material having the image thereon to transfer the image and non-image area to the receptor element,

(d) peeling away the support to obtain an imaged receptor element such as a fabric,

30 (e) placing a non-stick or tack-free overlay sheet (e.g. thin silicone sheet) over the imaged receptor element such as a fabric, and

(f) pressing the overlay sheet (e.g. silicone sheet) by hand ironing to drive the coating into the  
35 fabric and removing the overlay sheet.



The present invention also relates to a method of transferring image and non-image areas to a receptor element which comprises the steps of:

5 (a) placing an image on an image-receptive heat transfer paper (e.g. by thermal ribbon printers, impact ribbon printers, laser printers, dot matrix printers, crayons, or copying with a photocopier), which comprises:

10 a flexible cellulosic nonwoven web base sheet having top and bottom surfaces,

a melt transfer film layer overlaying the top surface of said base sheet, which melt transfer film layer comprises a film forming binder selected from the group consisting of ethylene-acrylic acid copolymers, polyolefins, and waxes and which melts in the range of  
15 from about 65 to about 180 degrees Celsius, and

an image-receptive film layer overlaying said melt-transfer film layer, which image-receptive film layer comprises about 15 to about 80 percent by weight of a  
20 film-forming binder selected from the group consisting of ethylene-acrylic acid copolymers, polyolefins, and waxes and from about 85 to about 20 percent by weight of a powdered thermoplastic polymer selected from the group consisting of polyolefins, polyesters, polyamides,  
25 waxes, epoxy polymers, ethylene-acrylic acid copolymers, and ethylene-vinyl acetate copolymers, wherein each of said film-forming binder and said powdered thermoplastic polymer melts in the range of from about 65°C to about 180 degrees Celsius and said powdered thermoplastic  
30 polymer consists of particles which are from about 2 to about 50 micrometers in diameter,

(b) positioning the top or front surface of the transfer material having the image thereon against a receptor element,

35 (c) applying heat to the rear or bottom surface of the transfer material having the image thereon to

transfer the image and non-image area to the receptor element,

(d) peeling away the support to obtain an imaged receptor element such as a fabric,

5 (e) placing a non-stick or tack-free overlay sheet (e.g. thin silicone sheet) over the imaged fabric, and

(f) pressing the overlay sheet (e.g. silicone sheet) by hand ironing to drive the coating into the fabric and removing the overlay sheet.

10 IMAGE RECEPTIVE HEAT TRANSFER PAPERS OF U.S. PATENT NO. 5,501,902

The process of the present invention is further applicable to the image receptive heat transfer materials of U.S. Patent No. 5,501,902. For instance,  
15 the present invention also relates to a method of transferring image and non-image areas to a receptor element which comprises the steps of:

(a) placing an image on an image-receptive heat transfer material having first and second surfaces (e.g.  
20 by laser printers, ink jet printers, dot-matrix printers, silk screening, direct and offset gravure printers, and photocopying), which comprises:

a first layer defining the first surface, said first layer having a front and rear surface, and

25 a second layer defining the second surface, which layer comprises particles of a thermoplastic polymer having largest dimensions of less than about 50 micrometers, from about 10 to about 50 weight percent of a film-forming binder, based on the weight of the thermoplastic polymer, and from about 0.2 to about 10  
30 weight percent of an ink viscosity modifier, based on the weight of the thermoplastic polymer,

(b) positioning the second layer of the transfer material having the image thereon against a receptor  
35 element,

(c) applying heat to a rear surface of the transfer material having the image thereon to transfer the image and non-image area to the receptor element,

(d) peeling away the support to obtain an imaged  
5 receptor element such as a fabric,

(e) placing a non-stick or tack-free overlay sheet (e.g. thin silicone sheet) over the imaged receptor element such as a fabric, and

(f) pressing the overlay sheet (e.g. silicone  
10 sheet) by hand ironing to drive the coating into the fabric and removing the overlay sheet.

The present invention also relates to a method of transferring image and non-image areas to a receptor element which comprises the steps of:

15 (a) placing an image on an image-receptive heat transfer material having a front and rear surface (e.g. by laser printers, ink jet printers, dot-matrix printers, silk screening, direct and offset gravure printers, and photocopying), which comprises:

20 a first layer having first and second surfaces and selected from the group consisting of films and cellulosic nonwoven webs; and

a second layer which is receptive to ink jet ink overlaying the first surface of the first layer, which  
25 second layer melts from about 65 to about 180°C and comprises particles of a thermoplastic polymer having largest dimensions of less than about 50 micrometers, from about 10 to about 50 weight percent of a film-forming binder, based on the thermoplastic polymer, and  
30 from about 2 to about 20 weight percent of a cationic polymer, based on the weight of the thermoplastic polymer,

(b) positioning the second layer of the transfer material having the image thereon against a receptor  
35 element,

(c) applying heat to the rear surface of the transfer material having the image thereon to transfer the image and non-image area to the receptor element,

(d) peeling away the support to obtain an imaged  
5 receptor element such as a fabric,

(e) placing a non-stick or tack-free overlay sheet (e.g. thin silicone sheet) over the imaged receptor element such as a fabric, and

(f) pressing the overlay sheet (e.g. silicone  
10 sheet) by hand ironing to drive the coating into the fabric and removing the overlay sheet.

The present invention also relates to a method of transferring image and non-image areas to a receptor element which comprises the steps of:

15 (a) placing an image on an image-receptive heat transfer material having a front and rear surface (e.g. by laser printers, ink jet printers, dot-matrix printers, silk screening, direct and offset gravure printers, and photocopying), which comprises:

20 a first layer having first and second surfaces and selected from the group consisting of films and cellulosic nonwoven webs; and

a third layer overlaying the first surface of the first layer; and

25 a second layer which is receptive to ink jet ink overlaying the second layer, which second layer melts from about 65 to about 180°C and comprises particles of a thermoplastic polymer having largest dimensions of less than about 50 micrometers, from about 10 to about  
30 50 weight percent of a film-forming binder, based on the thermoplastic polymer, and from about 2 to about 20 weight percent of a cationic polymer, based on the weight of the thermoplastic polymer,

(b) positioning the second layer of the transfer  
35 material having the image thereon against a receptor element,

(c) applying heat to the rear surface of the transfer material having the image thereon to transfer the image and non-image area to the receptor element,

(d) peeling away the support to obtain an imaged  
5 receptor element such as a fabric,

(e) placing a non-stick or tack-free overlay sheet (e.g. thin silicone sheet) over the imaged receptor element such as a fabric, and

(g) pressing the overlay sheet (e.g. silicone  
10 sheet) by hand ironing to drive the coating into the fabric and removing the overlay sheet.

#### CYCOLOR TRANSFER MATERIALS

The process of the invention is applicable to Cycolor transfer materials of U.S. Patent Nos. 5,139,917  
15 and 5,236,801.

A representative imaging sheet that may be used in the invention is the imaging sheet of U.S. Patent No. 5,139,917. This imaging sheet is set forth in FIG. 1 and is generally represented by reference numeral 10.  
20 The imaging sheet 10 includes a support 12 having a transfer coating layer 120 and a photosensitive layer 14 on one surface thereof. The layer 14 includes photosensitive microcapsules 16 and a developer resin (e.g., phenolic) 18. The microcapsules 16 and developer  
25 resin 18 do not need to be coated in the same layer, but can be coated in contiguous layers with the microcapsules underlying or overlying a layer of the developer resin. The support 12 may be a polymeric film. If the support 12 is transparent, the imaging  
30 sheet can be exposed from either surface. The developer layer 18 is not necessarily a film but may consist of finely divided dispersion particles. Similarly, developer layer 18 is not necessarily contiguous but may be interrupted by pores or capillaries.

Accordingly, the present invention also relates to a method of transferring image and non-image areas to a receptor element which comprises the steps of:

- 5 (a) exposing image-wise an imaging system, which comprises:
  - a support having a front and rear surface,
  - a transfer coating on said front surface of the support comprising a material capable of holding developed image and non-image areas that can be transferred to a receptor surface upon the application of heat to the rear surface of the support, said transfer coating layer capable of stripping from said front surface of the support and adhering to said receptor surface by liquefying and releasing from said support when heated and resolidifying within and around fibers of said receptor surface when heat is removed, said resolidified liquid seals the transferred image and non-image areas to the receptor surface rendering the transferred image washproof or wash resistant, and
  - 20 a layer of microcapsules on said transfer coating,
- (b) developing the image-wise exposed element to form an image,
- (c) positioning the front surface of the developed element or positioning the undeveloped element prior to development against a receptor element, said developed element or undeveloped element containing the transfer layer of the invention,
- (d) applying heat to the rear surface of the developed or undeveloped element to transfer the developed image and non-image area to the receptor element,
- (e) peeling away the support to obtain an imaged receptor element such as a fabric,
- (f) placing a non-stick or tack-free overlay sheet (e.g. thin silicone sheet) over the imaged receptor element such as a fabric, and
- 35

(g) pressing the non-stick or tack-free overlay sheet (e.g. silicone sheet) by hand ironing to drive the coating into the fabric and removing the overlay sheet.

The present invention also relates to a method of  
5 transferring image and non-image areas to a receptor element which comprises the steps of:

(a) exposing image-wise an imaging system, comprising (i) an imaging sheet and developer material carried on said imaging sheet, or (ii) an imaging sheet  
10 and a developer carried on a separate developer sheet, the imaging sheet having a layer of an encapsulated radiation curable photosensitive composition, said imaging system capable of forming images by image-wise exposing said imaging sheet to radiation actinic with  
15 respect to said photosensitive composition, and rupturing or dissolving capsules in the presence of said developer material to form an image, wherein a transfer coating on a front surface of a support of the imaging sheet, developer sheet or both comprising a material  
20 capable of holding developed image and non-image areas that can be transferred to a receptor surface upon the application of heat to the rear surface of the support, said transfer coating layer capable of stripping from said front surface of the support and adhering to said  
25 receptor surface by liquefying and releasing from said support when heated and resolidifying within and around fibers of said receptor surface when heat is removed, said resolidified liquid coating seals the transferred image and non-image areas to the receptor surface  
30 rendering the transferred image washproof or wash resistant,

(b) developing the image-wise exposed element to form an image,

(c) positioning the front surface of the developed  
35 element or positioning the undeveloped element prior to development against a receptor element, said developed

element or undeveloped element containing the transfer layer of the invention, and

(d) applying heat to the rear surface of the developed or undeveloped element to transfer the developed image and non-image area to the receptor element,

(e) peeling away the support to obtain an imaged receptor element such as a fabric,

(f) placing a non-stick or tack-free overlay sheet (e.g. thin silicone sheet) over the imaged receptor element such as a fabric, and

(g) pressing the non-stick or tack-free overlay sheet (e.g. silicone sheet) by hand ironing to drive the coating into the fabric and removing the overlay sheet.

The present invention also relates to a method of transferring image and non-image areas to a receptor element which comprises the steps of:

(a) exposing image-wise a transfer imaging system in which images are formed by image-wise reaction of one or more chromogenic materials and a developer, said system comprising,

an imaging sheet comprising a first substrate, a radiation curable composition which undergoes an increase in viscosity upon exposure to actinic radiation,

a coating on one surface of said first substrate comprising said chromogenic material and said radiation curable composition,

said radiation curable composition being encapsulated in rupturable capsules as an internal phase, and

a developer sheet comprising a second substrate having a front and rear surface,

a transfer coating on said front surface of the second substrate comprising a material capable of holding developed image and non-image areas that can be transferred to a receptor surface upon the application



of heat to the rear surface of the support, said transfer coating layer capable of stripping from said front surface of the support and adhering to said receptor surface by liquefying and releasing from said support when heated and resolidifying within and around fibers of said receptor surface when heat is removed, said resolidified liquid coating seals the transferred image and non-image areas to the receptor surface rendering the transferred image washproof or wash resistant, and

a developer material on said transfer coating capable of reacting with said chromogenic material to form an image on the surface of said second substrate, wherein images are formed by image-wise exposing said coating to actinic radiation, and rupturing capsules in the image areas with said coating in facial contact with said developer sheet such that said internal phase is image-wise released from said ruptured capsules and there is image-wise transfer of said chromogenic material to said developer sheet and a patterned image-forming reaction occurs between said chromogenic material and said developer material,

(b) developing the image-wise exposed element to form an image,

(c) positioning the front surface of the developed element or positioning the undeveloped element prior to development against a receptor element, said developed element or undeveloped element containing the transfer layer of the invention,

(d) applying heat to the rear surface of the developed or undeveloped element to transfer the developed image and non-image area to the receptor element,

(e) peeling away the support to obtain an imaged receptor element such as a fabric,

(f) placing a non-stick or tack-free overlay sheet (e.g. thin silicone sheet) over the imaged receptor element such as a fabric, and

(g) pressing the non-stick or tack-free overlay sheet (e.g. silicone sheet) by hand ironing to drive the coating into the fabric and removing the overlay sheet.

The present invention also relates to a method of transferring image and non-image areas to a receptor element which comprises the steps of:

10 (a) exposing image-wise a transfer imaging system in which images are formed by image-wise reaction of one or more chromogenic materials and a developer, said system comprising,

an imaging sheet comprising a first substrate,  
15 a chromogenic material,  
a photodepolymerizable composition which undergoes a decrease in viscosity upon exposure to actinic radiation,

a coating on one surface of said first substrate  
20 comprising said chromogenic material and said photodepolymerizable composition,

said photodepolymerizable composition being encapsulated in rupturable capsules as an internal phase, and

25 a developer sheet comprising a second substrate having a front and rear surface,

a transfer coating on said front surface of the second substrate comprising a material capable of holding developed image and non-image areas that can be  
30 transferred to a receptor surface upon the application of heat to the rear surface of the support, said transfer coating layer capable of stripping from said front surface of the support and adhering to said receptor surface by liquefying and releasing from said  
35 support when heated and resolidifying within and around fibers of said receptor surface when heat is removed, said resolidified liquid coating seals the transferred

image and non-image areas to the receptor surface rendering the transferred image washproof or wash resistant, and

5 a developer material on said transfer coating capable of reacting with said chromogenic material to form an image on the surface of said second substrate,

10 wherein images are formed by image-wise exposing said coating to actinic radiation, and rupturing capsules in the image areas with said coating in facial contact with said developer sheet such that said internal phase is image-wise released from said ruptured capsules and there is image-wise transfer of said chromogenic material to said developer sheet and a patterned image-forming reaction occurs between said  
15 chromogenic material and said developer material,

(b) developing the image-wise exposed element to form an image,

(c) positioning the front surface of the developed element or positioning the undeveloped element prior to  
20 development against a receptor element, said developed element or undeveloped element containing the transfer layer of the invention,

(d) applying heat to the rear surface of the developed or undeveloped element to transfer the  
25 developed image and non-image area to the receptor element,

(e) peeling away the support to obtain an imaged receptor element such as a fabric,

(f) placing a non-stick or tack-free overlay sheet  
30 (e.g. thin silicone sheet) over the imaged receptor element such as a fabric, and

(g) pressing the non-stick or tack-free overlay sheet (e.g. silicone sheet) by hand ironing to drive the coating into the fabric and removing the overlay sheet.

35 The present invention also relates to a method of transferring image and non-image areas to a receptor element which comprises the steps of:

(a) exposing image-wise an imaging material comprising a support having a front and rear surface, a transfer coating on said front surface of the support comprising a material capable of holding developed image and non-image areas that can be transferred to a receptor surface upon the application of heat to the rear surface of the support, said transfer coating layer capable of stripping from said front surface of the support and adhering to said receptor surface by liquefying and releasing from said support when heated and resolidifying within and around fibers of said receptor surface when heat is removed, said resolidified liquid coating seals the transferred image and non-image areas to the receptor surface rendering the transferred image washproof or wash resistant, and a layer of photosensitive microparticles on one surface of said support, said microparticles including an image-forming agent and a photosensitive composition containing a polymer which is capable of undergoing cationically initiated depolymerization and photoinitiator including a silver halide and an organo silver salt, wherein, after exposing said microparticle to radiation, said microparticles, directly or with additional processing, release said image-forming agent or become permeable to a developer which reacts with said image-forming agent to form a visible image,

(b) developing the image-wise exposed element to form an image,

(c) positioning the front surface of the developed element or positioning the undeveloped element prior to development against a receptor element, said developed element or undeveloped element containing the transfer layer of the invention,

(d) applying heat to the rear surface of the developed or undeveloped element to transfer the developed image and non-image area to the receptor element,

(e) peeling away the support to obtain an imaged receptor element such as a fabric,

(f) placing a non-stick or tack-free overlay sheet (e.g. thin silicone sheet) over the imaged receptor  
5 element such as a fabric, and

(g) pressing the non-stick or tack-free overlay sheet (e.g. silicone sheet) by hand ironing to drive the coating into the fabric and removing the overlay sheet.

The present invention also relates to a method of  
10 transferring image and non-image areas to a receptor element which comprises the steps of:

(a) exposing image-wise a color imaging system comprising:

an imaging sheet having a front and rear surface,  
15 a transfer coating on said front surface of the imaging sheet comprising a material capable of holding developed image and non-image areas that can be transferred to a receptor surface upon the application of heat to the rear surface of the imaging sheet, said  
20 transfer coating layer capable of stripping from said front surface of the support and adhering to said receptor surface by liquefying and releasing from said support when heated and resolidifying within and around  
25 fibers of said receptor surface when heat is removed, said resolidified liquid coating seals the transferred image and non-image areas to the receptor surface rendering the transferred image washproof or wash resistant, and dry developer material carried on said imaging sheet, or

30 an imaging sheet, a separate image receiving developer sheet having a front and rear surface and having said transfer coating and a dry developer material on said front surface,

35 said imaging sheet having on one surface thereof a coating and a dry developer material on said front surface,

said imaging sheet having on one surface thereof a coating comprising a cyan color precursor,

a radiation curable photosensitive composition associated with said cyan color precursor,

5 a magenta color precursor,

a radiation curable photosensitive composition associated with said magenta color precursor,

a yellow color precursor, and

10 a radiation curable photosensitive composition associated with said yellow color precursor,

said radiation curable photosensitive compositions having distinct sensitivities and being encapsulated in pressure rupturable capsules as an internal phase,

said capsules having discrete capsule walls,

15 said cyan, magenta and yellow color precursors being soluble in said associated photosensitive compositions or solvents for said color precursors being encapsulated with said associated photosensitive compositions and

20 said color precursors being present in said capsules with said photosensitive compositions or in said discrete walls;

said imaging system being capable of forming images by image-wise exposing said imaging sheet to radiation actinic with respect to said photosensitive compositions, and rupturing at least said capsules containing photosensitive compositions unexposed by said actinic radiation in the presence of said developer material to form an image by reaction of said color precursors with said developer material,

25 (b) developing the image-wise exposed element to form an image,

(c) positioning the front surface of the developed element or positioning the undeveloped element prior to development against a receptor element, said developed element or undeveloped element containing the transfer layer of the invention,

35

(d) applying heat to the rear surface of the developed or undeveloped element to transfer the developed image and non-image area to the receptor element,

5 (e) peeling away the support to obtain an imaged receptor element such as a fabric,

(f) placing a non-stick or tack-free overlay sheet (e.g. thin silicone sheet) over the imaged receptor sheet such as a fabric, and

10 (g) pressing the non-stick or tack-free overlay sheet (e.g. silicone sheet) by hand ironing to drive the coating into the fabric and removing the overlay sheet.

The process of the invention is applicable to Cyclic transfer material of Provisional Application No. 15 60/030,933, filed on November 15, 1996, entitled "Imaging Transfer System and Process for Transferring Image and Non-Image Areas Thereof to a Receptor Element," to Donald S. Hare. The present invention thus also relates to a method of transferring image and non- 20 image areas to a receptor element which comprises the steps of:

(a) exposing image-wise an imaging system, which comprises:

a support having a front and rear surface,  
25 at least one layer of microcapsules or at least one layer of microcapsules and developer in the same layer or at least one layer of microcapsules and developer in separate layers, on said front surface of the support, wherein the microcapsules or developer or microcapsules and developer are dispersed in a carrier which is 30 capable of transferring and adhering developed image and non-image areas from said front surface of said support upon the application of heat energy to the rear surface of the support, said carrier strips from said front 35 surface of the support by liquefying and releasing from said support when heated, said liquefied carrier providing adherence to a receptor element by flowing

onto said receptor element and solidifying thereon, said adherence does not require an external adhesive layer, with the proviso that the carrier is not capable of reacting to form an image, and when the microcapsules  
5 are present together in the same layer as the carrier, the carrier has a particle size which is the same as or smaller than that of the microcapsules, and

an optional protective layer of clear thermoplastic,

10 (b) developing the image-wise exposed element to form an image,

(c) positioning the front surface of the developed element or positioning the undeveloped element prior to development against a receptor element, said developed  
15 element or undeveloped element containing the transfer layer of the invention,

(d) applying heat to the rear surface of the developed or undeveloped element to transfer the developed image and non-image area to the receptor  
20 element,

(e) peeling away the support to obtain an imaged receptor element such as a fabric,

(f) placing a non-stick or tack-free overlay sheet (e.g. thin silicone sheet) over the imaged receptor  
25 element such as a fabric, and

(g) pressing the non-stick or tack-free overlay sheet (e.g. silicone sheet) by hand ironing to drive the coating into the fabric and removing the overlay sheet.

The present invention also relates to a method of  
30 transferring image and non-image areas to a receptor element which comprises the steps of:

(a) exposing image-wise an imaging system, which comprises:

a support having a front and rear surface,  
35 at least one layer of microcapsules on said front surface of the support, wherein the microcapsules are dispersed in a carrier which is capable of transferring



- and adhering developed image and non-image areas from said front surface of said support upon the application of heat energy to the rear surface of the support, said carrier strips from said front surface of the support by
- 5 liquefying and releasing from said support when heated, said liquefied carrier providing adherence to a receptor element by flowing onto said receptor element and solidifying thereon, said adherence does not require an external adhesive layer, with the proviso that the
- 10 carrier is not capable of reacting to form an image, and when the microcapsules are present together in the same layer as the carrier, the carrier has a particle size which is the same as or smaller than that of the microcapsules, and
- 15 an optional protective layer of clear thermoplastic,
- (b) developing the image-wise exposed element to form an image,
- (c) positioning the front surface of the developed
- 20 element or positioning the undeveloped element prior to development against a receptor element, said developed element or undeveloped element containing the transfer layer of the invention,
- (d) applying heat to the rear surface of the
- 25 developed or undeveloped element to transfer the developed image and non-image area to the receptor element,
- (e) peeling away the support to obtain an imaged receptor element such as a fabric,
- 30 (f) placing a non-stick or tack-free overlay sheet (e.g. thin silicone sheet) over the imaged receptor element such as a fabric, and
- (g) pressing the non-stick or tack-free overlay sheet (e.g. silicone sheet) by hand ironing to drive the
- 35 coating into the fabric and removing the overlay sheet.

The present invention also relates to a method of transferring image and non-image areas to a receptor element which comprises the steps of:

5 (a) exposing image-wise an imaging system, which comprises:

a support having a front and rear surface,  
at least one layer of microcapsules and developer  
in the same layer on said front surface of the support,  
wherein the microcapsules and developer are dispersed in  
10 a carrier which is capable of transferring and adhering  
developed image and non-image areas from said front  
surface of said support upon the application of heat  
energy to the rear surface of the support, said carrier  
strips from said front surface of the support by  
15 liquefying and releasing from said support when heated,  
said liquefied carrier providing adherence to a receptor  
element by flowing onto said receptor element and  
solidifying thereon, said adherence does not require an  
external adhesive layer, with the proviso that the  
20 carrier is not capable of reacting to form an image, and  
when the microcapsules are present together in the same  
layer as the carrier, the carrier has a particle size  
which is the same or smaller than that of the  
microcapsules,

25 an optional protective layer of clear  
thermoplastic,

(b) developing the image-wise exposed element to  
form an image,

30 (c) positioning the front surface of the developed  
element or positioning the undeveloped element prior to  
development against a receptor element, said developed  
element or undeveloped element containing the transfer  
layer of the invention,

35 (d) applying heat to the rear surface of the  
developed or undeveloped element to transfer the  
developed image and non-image area to the receptor  
element,

(e) peeling away the support to obtain an imaged receptor element such as a fabric,

(f) placing a non-stick or tack-free overlay sheet (e.g. thin silicone sheet) over the imaged receptor  
5 element such as a fabric, and

(g) pressing the overlay sheet (e.g. silicone sheet) by hand ironing to drive the coating into the fabric and removing the overlay sheet.

The present invention also relates to a method of  
10 transferring image and non-image areas to a receptor element which comprises the steps of:

(a) exposing image-wise an imaging system comprising (i) an imaging sheet and developer material carried on said imaging sheet, or (ii) an imaging sheet  
15 and a developer carried on a separate developer sheet, the imaging sheet having a layer of an encapsulated radiation curable photosensitive composition, said imaging system capable of forming images by image-wise exposing said imaging sheet to radiation actinic with  
20 respect to said photosensitive composition, and rupturing or dissolving capsules in the presence of said developer material to form an image, wherein at least one layer of microcapsules or at least one layer of microcapsules and developer in the same layer, or at  
25 least one layer of microcapsules and developer in separate layers, on said front surface of the support, wherein the microcapsules or developer or microcapsules and developer are dispersed in a carrier which is capable of transferring and adhering developed image and  
30 non-image areas from said front surface of said support upon the application of heat energy to the rear surface of the support, said carrier strips from said front surface of the support by liquefying and releasing from said support when heated, said liquefied carrier  
35 providing adherence to a receptor element by flowing onto said receptor element and solidifying thereon, said adherence does not require an external adhesive layer,

with the proviso that the carrier is not capable of reacting to form an image, and when the microcapsules are present together in the same layer as the carrier, the carrier has a particle size which is the same as or  
5 smaller than that of the microcapsules,

(b) developing the image-wise exposed element to form an image,

(c) positioning the front surface of the developed element or positioning the undeveloped element prior to  
10 development against a receptor element, said developed element or undeveloped element containing the transfer layer of the invention,

(d) applying heat to the rear surface of the developed or undeveloped element to transfer the  
15 developed image and non-image area to the receptor element,

(e) peeling away the support to obtain an imaged receptor element such as a fabric,

(f) placing a non-stick or tack-free overlay sheet  
20 (e.g. thin silicone sheet) over the imaged receptor element such as a fabric, and

(g) pressing the overlay sheet (e.g. silicone sheet) by hand ironing to drive the coating into the fabric and removing the overlay sheet.

25 The present invention also relates to a method of transferring image and non-image areas to a receptor element which comprises the steps of:

(a) exposing image-wise an imaging material comprising a support having a front and rear surface,  
30 and a layer of photosensitive microparticles on one surface of said support, wherein the microparticles are dispersed in a carrier which is capable of transferring and adhering developed image and non-image areas from said front surface of said support upon the application  
35 of heat energy to the rear surface of the support, said carrier strips from said front surface of the support by liquefying and releasing from said support when heated,

said liquefied carrier providing adherence to a receptor element by flowing onto said receptor element and solidifying thereon, said adherence does not require an external adhesive layer, with the proviso that the carrier is not capable of reacting to form an image, and when the microcapsules are present together in the same layer as the carrier, the carrier has a particle size which is the same as or smaller than that of the microcapsules, said microparticles including an image-forming agent and a photosensitive composition containing a polymer which is capable of undergoing cationically-initiated depolymerization and photoinitiator including a silver halide and an organo silver salt, wherein, after exposing said microparticle to radiation, said microparticles, directly or with additional processing, release said image-forming agent or become permeable to a developer which reacts with said image-forming agent to form a visible image,

(b) developing the image-wise exposed element to form an image,

(c) positioning the front surface of the developed element or positioning the undeveloped element prior to development against a receptor element, said developed element or undeveloped element containing the transfer layer of the invention,

(d) applying heat to the rear surface of the developed or undeveloped element to transfer the developed image and non-image area to the receptor element,

(e) peeling away the support to obtain an imaged receptor element such as a fabric,

(f) placing a non-stick or tack-free overlay sheet (e.g. thin silicone sheet) over the imaged fabric, and

(g) pressing the overlay sheet (e.g. silicone sheet) by hand ironing to drive the coating into the fabric and removing the overlay sheet.

The imaged transfer material also encompasses the imaged developer or receiver sheet as defined in U.S. Patent No. 5,236,801 and the above-mentioned Provisional Application to Donald S. Hare filed on November 15, 1996. The present invention also relates to a method of applying an image to a receptor element, which comprises the steps of:

- (a) exposing imagewise an imaging system which comprises, a support having a front and rear surface, at least one layer of (e.g. photosensitive or thermal-sensitive) microcapsules, or at least one layer of (e.g. photosensitive or thermal-sensitive) microcapsules and developer in the same layer, or at least one layer of (e.g. photosensitive or thermal-sensitive) microcapsules and developer in separate layers, on said front surface of the support, wherein said microcapsules, or developer or both are dispersed in the carrier of the invention, said carrier preferably having a melting point of at least 100°C, and which is capable of transferring and adhering developed image and non-image areas from said front surface of said support upon the application of heat energy to the rear surface of the support, said carrier strips from said front surface of the support by liquefying and releasing from said support when heated, said liquefied carrier providing adherence to a receptor element by flowing onto said receptor element and solidifying thereon, said adherence does not require an external (e.g. surface) adhesive layer and preferably occurs in an area at least coextensive with the area of said microcapsules, with the proviso that the carrier is not capable of reacting (e.g. with a color precursor) to form an image, and an optional layer of clear thermoplastic material (i.e. preferably, the particle size of the carrier is the same as or smaller than that of the microcapsules, for example, from 1-20 micrometers),

(b) developing the imagewise exposed element to form an image,

(c) positioning the front surface of said developed element (or positioning the undeveloped element prior to development) against said receptor element,

(d) applying energy (e.g. heat) to the rear surface of the element to transfer the developed image and nonimage area to said receptor element,

(e) peeling away the support to obtain an imaged receptor element such as a fabric,

(f) placing a non-stick or tack-free overlay sheet (e.g. thin silicone sheet) over the imaged receptor element such as a fabric, and

(g) pressing the overlay sheet (e.g. silicone sheet) by hand ironing to drive the coating into the fabric and removing the overlay sheet.

TRANSFER MATERIAL CONTAINING ENERGY SENSITIVE RESIN OF  
U.S. PATENT 4,980,224

The invention is further applicable to the transfer sheet of U.S. Patent 4,980,224. Thus, the present invention further relates to a method of applying an image to a receptor element, which comprises the steps of:

(a) generating an image on an obverse surface of a transfer sheet, said transfer sheet including a substrate, a first coating on said substrate of material transferable from said substrate to a receptor surface by the application of heat or pressure thereto, and a second coating on said first coating, said second coating consisting essentially of a mixture of Singapore Dammar resin and abrasive particles to form an abrasive surface for increasing the receptivity of the transfer sheet;

(b) positioning that obverse surface of said transfer sheet against said receptor element,

(c) applying energy (e.g. heat and/or pressure) to the rear of said transfer sheet to transfer said image to said receptor element,

(d) peeling away the substrate to obtain an imaged  
5 receptor element such as a fabric,

(e) placing a non-stick or tack-free overlay sheet (e.g. thin silicone sheet) over the imaged receptor element such as a fabric, and

(f) pressing the overlay sheet (e.g. silicone  
10 sheet) by hand ironing to drive the coating into the fabric and removing the overlay sheet.

The present invention further relates to a method of applying an image to a receptor element, which comprises the steps of:

(a) generating an image on an obverse surface of  
15 a transfer sheet, said transfer sheet including a substrate, a first coating on said substrate of material transferable from said substrate to a receptor surface by the application of heat or pressure thereto, and a  
20 second coating on said first coating, said second coating consisting essentially of a mixture of resin and sugar granules to form an abrasive surface for increasing the receptivity of the transfer sheet;

(b) positioning that obverse surface of said  
25 transfer sheet against said receptor element,

(c) applying energy (e.g. heat and/or pressure) to the rear of said transfer sheet to transfer said image to said receptor element,

(d) peeling away the substrate to obtain an imaged  
30 receptor element such as a fabric,

(e) placing a non-stick or tack-free overlay sheet (e.g. thin silicone sheet) over the imaged fabric, and

(f) pressing the overlay sheet (e.g. silicone  
sheet) by hand ironing to drive the coating into the  
35 fabric and removing the overlay sheet.



TRANSFER MATERIAL CONTAINING ENERGY SENSITIVE RESIN OF  
U.S. PATENT 4,966,815

The invention is further applicable to the transfer  
sheet of U.S. Patent 4,966,815. Thus, the present  
5 invention further relates to a method of applying an  
image to a receptor element, which comprises the steps  
of:

- (a) electronically generating an image,
- (b) electronically transferring said image to a  
10 printer,
- (c) printing said image with the aid of said  
printer on an obverse surface of a transfer sheet, said  
transfer sheet including a substrate with a first  
coating thereon transferable therefrom to said fabric by  
15 the application of heat or pressure thereto, and a  
second coating on said first coating, said second  
coating defining said obverse face and comprising  
Singapore Dammar resin;
- (d) positioning that obverse surface of said  
20 transfer sheet against said receptor element,
- (e) applying energy (e.g. heat and/or pressure) to  
the rear of said transfer sheet to transfer said image  
to said receptor element,
- (f) peeling away the substrate to obtain an imaged  
25 receptor element such as a fabric,
- (g) placing a non-stick or tack-free overlay sheet  
(e.g. thin silicone sheet) over the imaged receptor  
element such as a fabric, and
- (h) pressing the overlay sheet (e.g. silicone  
30 sheet) by hand ironing to drive the coating into the  
fabric and removing the overlay sheet.

The benefits of the present invention are  
applicable to laser, black and white, and color copiers  
and printers as well as other copiers and printers such  
35 as ink jet.

The following examples are provided for a further understanding of the invention, however, the invention is not to be construed as being limited thereto.

#### COMPARATIVE EXAMPLE

5       The following instructions are taken directly from the instructions using Canon T-Shirt Transfers TR-101.

Items required:

-Canon T-shirt Transfer paper TR-101

10       -Canon Color Bubble Jet BJC-4000 series or BJC-600 series printer.

-Cotton or cotton-poly blend garment or fabric.

Light colors work best.

-Household hand iron.

-Pillow case.

15       -Ironing Surface- use on formica or glass surface only. Do not use ironing board. Be sure that the ironing surface is smooth and free of any imperfections (scratches, dents, etc) as it will affect the transfer.

Printing the transfer:

20       -Insert one transfer sheet into printer with the blank side face up. Do not insert more than one transfer sheet into printer at a time. If lead edge is curled, straighten before feeding.

25       -Set the paper selection lever to the back position.

-Use any application to create the image.

30       -Before printing the image, make sure that "Media Options" setting in the printer driver has been set to "Back Print Film". This setting will print the image in reverse on the transfer media so that it will appear correctly when it is ironed on.

Preparing the transfer:

35       -For best results cut away the unprinted portion of the transfer, coming as close to the printed area as possible. If an unprinted portion of the transfer is applied to the fabric it will cause the fabric to become stiff.

## Ironing Instructions:

The following numbered steps correspond to the steps in the directions in Canon T-Shirt Transfers TR-101 (copyright 1995); CST-4051-002.

5        1.    Pre-heat iron on "highest" setting for 8 minutes.

         2.    Place the pillowcase, with the seam overhanging the edge, on the ironing surface.

         3.    Fold the pillowcase in half, with the seam  
10       still hanging over the edge of the ironing surface.

         4.    Place the garment onto the wrinkle-free pillowcase centering the area of the garment which will receive the printed transfer over the pillowcase. Be sure garment is wrinkle-free.

15       5.    Center transfer, printed side down onto the garment (making certain the entire transfer is over the pillowcase).

         -Before ironing, make a small fold in lower left corner of transfer. Only 1/4" fold is necessary. Do not  
20       fold beyond the edge of printed area underneath. This fold will provide a good grip from which to peel the transfer.

         6.    Place the iron over both edges of the transfer, beginning in the upper left corner. The hand iron will  
25       always be positioned point facing down for each step.

         7.    Starting from one edge, push iron slowly along the long side of the transfer for at least 15 seconds using firm body pressure while pressing down on iron. Be certain iron overlaps all edges of transfer. While  
30       pushing iron, count 1,000, 2,000, 3,000 up to 15,000. This will take approximately 15 seconds.

         8.    Reposition iron over both edges of the transfer beginning in the lower left corner.

         9.    Starting from one edge, push iron slowly along  
35       long side of transfer for 15 seconds using firm body pressure while pressing down iron. Be certain iron overlaps all edges of transfer.

10. Repeat Steps 6 through 9.

11. Immediately reheat entire surface by making 10 complete circles with iron over the transfer, being absolutely certain that the flat bottom of the iron covers the entire surface of the transfer paying special attention to all edges and corners.

12. Immediately place iron aside, beginning with folded-in corner, peel transfer from fabric using firm, steady pressure. If transfer is difficult to peel from shirt, do not fight it. Simply reheat that section of transfer which does not release by making three light circles, covering all edges and corners with flat part of iron. Place iron down immediately and peel while hot.

13. Gently smooth the fabric with your hands and allow to cool for at least at 2 minutes.

#### INVENTIVE EXAMPLE 1

Repeat steps 1-12 of the comparative example. After step 12 or optionally after step 13, place a silicone sheet over the imaged fabric. Press the silicone sheet by hand ironing at the highest setting on the iron to drive the coating into the valleys of the fabric by repeating steps 6-9 of the Comparative Example (with the silicone sheet), except change the time from 15 to 30 seconds for each of steps 7 and 9.

#### INVENTIVE EXAMPLE 2

Referring to FIG. 2, the method of applying the image and non-image areas to a receptor element will be described. The imaging sheet 50 is prepared, exposed and developed to form an image as in Example 1 of U.S. Patent No. 5,139,917. A receptor element (e.g., tee shirt 62) is laid flat as illustrated, on an appropriate support surface, and the front surface of the imaging sheet 50 is positioned on the tee-shirt. An iron 64 is run and pressed across the back 52A of the imaging sheet. The image and non-image areas are transferred to the tee-shirt and the support is removed and discarded.

Place a silicone sheet over the imaged fabric. Press the silicone sheet by hand ironing at the highest setting on the iron to drive the coating into the valleys of the fabric by repeating steps 6-9 of the Comparative Example (with the silicone sheet), except  
5 change the time from 15 to 30 seconds for each of steps 7 and 9.

The contents of each of the above-mentioned U.S. patents, copending applications and provisional  
10 applications are herein incorporated by reference.

The invention being thus described, it will be obvious that the same may be varied in many ways. Such variations are not to be regarded as a departure from the spirit and scope of the present invention, and all  
15 such modifications as would be obvious to one skilled in the art are intended to be included within the scope of the following claims.

## I CLAIM:

- 1           1. A method for applying an image to a receptor  
2 element, which comprises the steps of:
  - 3           (i) hand ironing the rear surface of an imaged  
4 transfer material comprising a support sheet, a transfer  
5 coating and an image thereon, said support sheet having  
6 a front and back surface, said transfer coating and said  
7 image positioned on said front surface of said support  
8 sheet, said transfer coating melts and adheres to a  
9 receptor element having valleys or pores on the surface  
10 thereof as a result of said hand ironing on the rear  
11 surface of said imaged transfer material, said image and  
12 non-image areas are carried with the melted carrier to  
13 the receptor element and the carrier resolidifies within  
14 the receptor element embedding the image and non-image  
15 areas therein, said transfer coating and image are in  
16 contact with the receptor element,  
17           (ii) peeling away the support sheet to obtain an  
18 imaged receptor element,  
19           (iii) placing a non-stick sheet over the imaged  
20 receptor element, and  
21           (iv) pressing the non-stick sheet with a hand iron  
22 in order to press the transfer coating into the valleys  
23 of the receptor element.

1           2.    The method of claim 1, wherein said transfer  
2    coating is capable of transferring and adhering image  
3    and non-image areas from said front surface of said  
4    support upon the application of heat energy to the rear  
5    surface of the support, said transfer coating strips  
6    from said front surface of the support by liquefying and  
7    releasing from said support when heated, said liquefied  
8    carrier providing adherence to a receptor element by  
9    flowing onto said receptor element and solidifying  
10   thereon, said adherence does not require an external  
11   adhesive layer.

1           3.    The method of claim 1, wherein said transfer  
2    material is a Cycolor transfer material.

1           4.    The method of claim 1, wherein said receptor  
2    element is a tee shirt.

1           5.    The method claim 1, which comprises the  
2    following steps:

3           (a) placing an image on an image-receptive heat  
4    transfer material having front and rear surfaces, which  
5    comprises:

6           a flexible cellulosic nonwoven web base sheet  
7    having top and bottom surfaces,  
8           an image-receptive melt-transfer film layer  
9    overlaying the top surface of said base sheet, which  
10   image-receptive melt-transfer film layer is comprised of  
11   a thermoplastic polymer selected from the group  
12   consisting of polyolefins, polyesters, and ethylene-  
13   vinyl acetate copolymers and which melts in the range of  
14   from about 65 to about 180 degrees Celsius, in which the  
15   exposed surface of said image-receptive melt-transfer  
16   layers has a smoothness value, independent of the  
17   smoothness of the base sheet, of at least about 10  
18   cc/minute as measured by a Sheffield Smoothness Tester,

19 (b) positioning the front surface of the transfer  
20 material having the image thereon against a receptor  
21 element,

22 (c) hand ironing the rear surface of the transfer  
23 material having the image thereon to transfer the image  
24 and non-image area to the receptor element,

25 (d) peeling away the base sheet to obtain an  
26 imaged receptor element,

27 (e) placing a stick-free overlay sheet over the  
28 imaged receptor element, and

29 (f) pressing the overlay sheet by hand ironing to  
30 drive the coating into the receptor element.

1 6. The method of claim 1, which comprises the  
2 following steps:

3 (a) placing an image on an image-receptive heat  
4 transfer material having front and rear surfaces, which  
5 comprises:

6 a flexible cellulosic nonwoven web base sheet  
7 having top and bottom surfaces,

8 a melt extruded, melt-transfer film layer  
9 overlaying the top surface of said base sheet, which  
10 melt transfer film layer is comprised of a first  
11 thermoplastic polymer selected from the group consisting  
12 of polyolefins, polyesters, and ethylene-vinyl acetate  
13 copolymers, ethylene-methacrylic acid copolymers, and  
14 ethylene-acrylic acid copolymers, and ethylene-acrylic  
15 acid copolymers and which melts in the range of from  
16 about 65 to about 180 degrees Celsius, and

17 a melt-extruded, image receptive film layer  
18 overlaying said melt-transfer layer, which image-  
19 receptive film layer is comprised of a second  
20 thermoplastic polymer selected from the group consisting  
21 of polyolefins, polyesters, and ethylene-vinyl acetate  
22 copolymers and which melts in the range of from about 65  
23 to about 180 degrees Celsius, in which the exposed  
24 surface of said image-receptive melt-transfer layers has



25 a smoothness value, independent of the smoothness of the  
26 base sheet, of at least about 10 cc/minute as measured  
27 by a Sheffield Smoothness Tester,

28 (b) positioning the front surface of the transfer  
29 material having the image thereon against a receptor  
30 element,

31 (c) hand ironing the rear surface of the transfer  
32 material having the image thereon to transfer the image  
33 and non-image area to the receptor element,

34 (d) peeling away the base sheet to obtain an  
35 imaged receptor element,

36 (e) placing a stick-free overlay sheet over the  
37 imaged receptor element, and

38 (f) pressing the overlay sheet by hand ironing to  
39 drive the coating into the receptor element.

1 7. The method of claim 1, which comprises the  
2 following steps:

3 (a) placing an image on an image-receptive heat  
4 transfer material having front and rear surfaces, which  
5 comprises:

6 a flexible cellulosic nonwoven web base sheet  
7 having top and bottom surfaces,

8 an image-receptive melt-transfer film layer  
9 overlaying the top surface of said base sheet, which  
10 image-receptive melt-transfer film layer comprises about  
11 15 to about 80 percent by weight of a film-forming  
12 binder selected from the group consisting of ethylene-  
13 acrylic acid copolymers, polyolefins, and waxes and from  
14 about 85 to about 20 percent by weight of a powdered  
15 thermoplastic polymer selected from the group consisting  
16 of polyolefins, polyesters, polyamides, waxes, epoxy  
17 polymers, ethylene-acrylic acid copolymers, and  
18 ethylene-vinyl acetate copolymers, wherein each of said  
19 film-forming binder and said powdered thermoplastic  
20 polymer melts in the range of from about 65°C to about  
21 180 degrees Celsius and said powdered thermoplastic

22 polymer consists of particles of about 2 to about 50  
23 micrometers in diameter,

24 (b) positioning the front surface of the transfer  
25 material having the image thereon against a receptor  
26 element,

27 (c) hand ironing the rear surface of the transfer  
28 material having the image thereon to transfer the image  
29 and non-image area to the receptor element,

30 (d) peeling away the base sheet to obtain an  
31 imaged receptor element,

32 (e) placing a tack-free overlay sheet over the  
33 imaged receptor element, and

34 (f) pressing the overlay sheet by hand ironing to  
35 drive the coating into the receptor element.

1 8. The method of claim 1, which comprises the  
2 following steps:

3 (a) placing an image on an image-receptive heat  
4 transfer material having front and rear surfaces, which  
5 comprises:

6 a flexible cellulosic nonwoven web base sheet  
7 having top and bottom surfaces,

8 a melt transfer film layer overlaying the top  
9 surface of said base sheet, which melt transfer film  
10 layer comprises a film forming binder selected from the  
11 group consisting of ethylene-acrylic acid copolymers,  
12 polyolefins, and waxes and which melts in the range of  
13 from about 65 to about 180 degrees Celsius, and

14 an image-receptive film layer overlaying said melt-  
15 transfer film layer, which image-receptive film layer  
16 comprises about 15 to about 80 percent by weight of a  
17 film-forming binder selected from the group consisting  
18 of ethylene-acrylic acid copolymers, polyolefins, and  
19 waxes and from about 85 to about 20 percent by weight of  
20 a powdered thermoplastic polymer selected from the group  
21 consisting of polyolefins, polyesters, polyamides,  
22 waxes, epoxy polymers, ethylene-acrylic acid copolymers,

23 and ethylene-vinyl acetate copolymers, wherein each of  
24 said film-forming binder and said powdered thermoplastic  
25 polymer melts in the range of from about 65°C to about  
26 180 degrees Celsius and said powdered thermoplastic  
27 polymer consists of particles of about 2 to about 50  
28 micrometers in diameter,

29 (b) positioning the front surface of the transfer  
30 material having the image thereon against a receptor  
31 element,

32 (c) hand ironing the rear surface of the transfer  
33 material having the image thereon to transfer the image  
34 and non-image area to the receptor element,

35 (d) peeling away the base sheet to obtain an  
36 imaged receptor element,

37 (e) placing a tack-free overlay sheet over the  
38 imaged receptor element, and

39 (g) pressing the overlay sheet by hand ironing to  
40 drive the coating into the receptor material.

1 9. The method of claim 1, which comprises the  
2 following steps:

3 (a) placing an image on an image-receptive heat  
4 transfer material having front and rear surfaces, which  
5 comprises:

6 a first layer defining a first surface, and

7 a second layer defining a second surface, which  
8 layer comprises particles of a thermoplastic polymer  
9 having dimensions of less than about 50 micrometers,  
10 from about 10 to about 50 weight percent of a film-  
11 forming binder, based on the weight of the thermoplastic  
12 polymer, and from about 0.2 to about 10 weight percent  
13 of an ink viscosity modifier, based on the weight of the  
14 thermoplastic polymer,

15 (b) positioning the second layer of the transfer  
16 material having the image thereon against a receptor  
17 element,

18 (c) hand ironing the rear surface of the transfer  
19 material having the image thereon to transfer the image  
20 and non-image area to the receptor element,

21 (d) peeling away the first layer to obtain an  
22 imaged receptor element,

23 (e) placing a tack-free overlay sheet over the  
24 imaged receptor element, and

25 (g) pressing the overlay sheet by hand ironing to  
26 drive the coating into the receptor element.

1 10. The method of claim 1, which comprises the  
2 following steps:

3 (a) placing an image on an image-receptive heat  
4 transfer material having front and rear surfaces, which  
5 comprises:

6 a first layer having first and second surfaces and  
7 selected from the group consisting of films and  
8 cellulosic nonwoven webs; and

9 a second layer which is receptive to ink jet ink  
10 overlaying the first surface of the first layer, which  
11 second layer melts from about 65 to about 180°C and  
12 comprises particles of a thermoplastic polymer having  
13 dimensions of less than about 50 micrometers, from about  
14 10 to about 50 weight percent of a film-forming binder,  
15 based on the thermoplastic polymer, and from about 2 to  
16 about 20 weight percent of a cationic polymer, based on  
17 the weight of the thermoplastic polymer,

18 (b) positioning the second layer of the transfer  
19 material having the image thereon against a receptor  
20 element,

21 (c) hand ironing the rear surface of the transfer  
22 material having the image thereon to transfer the image  
23 and non-image area to the receptor element,

24 (d) peeling away the first layer to obtain an  
25 imaged receptor element,

26 (e) placing a tack-free overlay sheet over the  
27 imaged receptor element, and

28 (g) pressing the overlay sheet by hand ironing to  
29 drive the coating into the receptor element.

1 11. The method of claim 1, which comprises the  
2 following steps:

3 (a) placing an image on an image-receptive heat  
4 transfer material having front and rear surfaces, which  
5 comprises:

6 a first layer having first and second surfaces and  
7 selected from the group consisting of films and  
8 cellulosic nonwoven webs; and

9 a third layer overlaying the first surface of the  
10 first layer; and

11 a second layer which is receptive to ink jet ink  
12 overlaying the third layer, which second layer melts  
13 from about 65 to about 180°C and comprises particles of  
14 a thermoplastic polymer having dimensions of less than  
15 about 50 micrometers, from about 10 to about 50 weight  
16 percent of a film-forming binder, based on the  
17 thermoplastic polymer, and from about 2 to about 20  
18 weight percent of a cationic polymer, based on the  
19 weight of the thermoplastic polymer,

20 (b) positioning the second layer of the transfer  
21 material having the image thereon against a receptor  
22 element,

23 (c) hand ironing the rear surface of the transfer  
24 material having the image thereon to transfer the image  
25 and non-image area to the receptor element,

26 (d) peeling away the first layer to obtain an  
27 imaged receptor element,

28 (e) placing a tack-free overlay sheet over the  
29 imaged receptor element, and

30 (g) pressing the overlay sheet by hand ironing to  
31 drive the coating into the receptor element.

1           12. The method of claim 1, which comprises the  
2 following steps:

3           (a) exposing image-wise an imaging system having  
4 front and rear surfaces, which comprises:

5           a support having a front and rear surface,

6           a transfer coating on said front surface of the  
7 support comprising a material capable of holding  
8 developed image and non-image areas that can be  
9 transferred to a receptor surface upon the application  
10 of heat to the rear surface of the support, said  
11 transfer coating layer capable of stripping from said  
12 front surface of the support and adhering to said  
13 receptor surface by liquefying and releasing from said  
14 support when heated and resolidifying within and around  
15 fibers of said receptor surface when heat is removed,  
16 said resolidified liquid seals the transferred image and  
17 non-image areas to the receptor surface rendering the  
18 transferred image washproof or wash resistant, and

19           a layer of microcapsules on said transfer coating,

20           (b) developing the image-wise exposed imaging  
21 system to form an image,

22           (c) positioning the front surface of the developed  
23 imaging system or positioning the undeveloped imaging  
24 system prior to development against a receptor element,  
25 said developed imaging system or undeveloped imaging  
26 system containing the transfer layer of the invention,

27           (d) hand ironing the rear surface of the developed  
28 or undeveloped imaging system to transfer the developed  
29 image and non-image area to the receptor element,

30           (e) peeling away the support to obtain an imaged  
31 receptor element,

32           (f) placing a tack-free overlay sheet over the  
33 imaged receptor element, and

34           (g) pressing the overlay sheet by hand ironing to  
35 drive the coating into the receptor element.

1        13. The method of claim 1, which comprises the  
2 following steps:

3        (a) exposing image-wise in an imaging system  
4 having front and rear surfaces, comprising (i) an  
5 imaging sheet and developer material carried on said  
6 imaging sheet, or (ii) an imaging sheet and a developer  
7 carried on a separate developer sheet, the imaging sheet  
8 having a layer of an encapsulated radiation curable  
9 photosensitive composition, said imaging system capable  
10 of forming images by image-wise exposing said imaging  
11 sheet to radiation actinic with respect to said  
12 photosensitive composition, and rupturing or dissolving  
13 capsules in the presence of said developer material to  
14 form an image, wherein the improvement comprises a  
15 transfer coating on a front surface of a support of the  
16 imaging sheet, developing sheet or both comprising a  
17 material capable of holding developed image and non-  
18 image areas that can be transferred to a receptor  
19 surface upon the application of heat to the rear surface  
20 of the support, said transfer coating layer capable of  
21 stripping from said front surface of the support and  
22 adhering to said receptor surface by liquefying and  
23 releasing from said support when heated and  
24 resolidifying within and around fibers of said receptor  
25 surface when heat is removed, said resolidified liquid  
26 coating seals the transferred image and non-image areas  
27 to the receptor surface rendering the transferred image  
28 washproof or wash resistant,

29        (b) developing the image-wise exposed imaging  
30 system to form an image,

31        (c) positioning the front surface of the imaging  
32 system or positioning the undeveloped imaging system  
33 prior to development against a receptor element, said  
34 developed imaging system or undeveloped imaging system  
35 containing the transfer layer of the invention,

36 (d) hand ironing the rear surface of the developed  
37 or undeveloped imaging system to transfer the developed  
38 image and non-image area to the receptor element,

39 (e) peeling away the imaging sheet or developer  
40 sheet to obtain an imaged receptor element,

41 (f) placing a tack-free overlay sheet over the  
42 imaged receptor element, and

43 (g) pressing the overlay sheet by hand ironing to  
44 drive the coating into the receptor element.

1 14. The method of claim 1, which comprises the  
2 following steps:

3 (a) exposing image-wise a transfer imaging system  
4 in which images are formed by image-wise reaction of one  
5 or more chromogenic materials and a developer, said  
6 system comprising,

7 an imaging sheet comprising a first substrate,  
8 a radiation curable composition which undergoes an  
9 increase in viscosity upon exposure to actinic  
10 radiation,

11 a coating on one surface of said first substrate  
12 comprising said chromogenic material and said radiation  
13 curable composition

14 said radiation curable composition being  
15 encapsulated in rupturable capsules as an internal  
16 phase, and

17 a developer sheet comprising a second substrate  
18 having a front and rear surface,

19 a transfer coating on said front surface of the  
20 second substrate comprising a material capable of  
21 holding developed image and non-image areas that can be  
22 transferred to a receptor surface upon the application  
23 of heat to the rear surface of the support, said  
24 transfer coating layer capable of stripping from said  
25 front surface of the support and adhering to said  
26 receptor surface by liquefying and releasing from said  
27 support when heated and resolidifying within and around



28 fibers of said receptor surface when heat is removed,  
29 said resolidified liquid coating seals the transferred  
30 image and non-image areas to the receptor surface  
31 rendering the transferred image washproof or wash  
32 resistant, and

33 a developer material on said transfer coating  
34 capable of reacting with said chromogenic material to  
35 form an image on the surface of said second substrate,

36 wherein images are formed by image-wise exposing  
37 said coating to actinic radiation, and rupturing  
38 capsules in the image areas with said coating in facial  
39 contact with said developer sheet such that said  
40 internal phase is image-wise released from said ruptured  
41 capsules and there is image-wise transfer of said  
42 chromogenic material to said developer sheet and a  
43 patterned image-forming reaction occurs between said  
44 chromogenic material and said developer material,

45 (b) developing the image-wise exposed imaging  
46 system to form an image,

47 (c) positioning the front surface of the developed  
48 developer sheet or positioning the undeveloped developer  
49 sheet prior to development against a receptor element,  
50 said developed developer sheet or undeveloped developer  
51 sheet containing the transfer layer of the invention,

52 (d) hand ironing the rear surface of the developed  
53 or undeveloped developer sheet to transfer the developed  
54 image and non-image area to the receptor element,

55 (e) peeling away the developer sheet to obtain an  
56 imaged receptor element,

57 (f) placing a tack-free overlay sheet over the  
58 imaged receptor element, and

59 (g) pressing the overlay sheet by hand ironing to  
60 drive the coating into the receptor element.

1           15. The method of claim 1, which comprises the  
2 following steps:

3           (a) exposing image-wise a transfer imaging system  
4 in which images are formed by image-wise reaction of one  
5 or more chromogenic materials and a developer, said  
6 system comprising,

7           an imaging sheet comprising a first substrate,

8           a chromogenic material,

9           a photodepolymerizable composition which undergoes  
10 a decrease in viscosity upon exposure to actinic  
11 radiation,

12           a coating on one surface of said first substrate  
13 comprising said chromogenic material and said  
14 photodepolymerizable composition,

15           said photodepolymerizable composition being  
16 encapsulated in rupturable capsules as an internal  
17 phase, and

18           a developer sheet comprising a second substrate  
19 having a front and rear surface,

20           a transfer coating on said front surface of the  
21 second substrate comprising a material capable of  
22 holding developed image and non-image areas that can be  
23 transferred to a receptor surface upon the application  
24 of heat to the rear surface of the support, said  
25 transfer coating layer capable of stripping from said  
26 front surface of the support and adhering to said  
27 receptor surface by liquefying and releasing from said  
28 support when heated and resolidifying within and around  
29 fibers of said receptor surface when heat is removed,  
30 said resolidified liquid coating seals the transferred  
31 image and non-image areas to the receptor surface  
32 rendering the transferred image washproof or wash  
33 resistant, and

34           a developer material on said transfer coating  
35 capable of reacting with said chromogenic material to  
36 form an image on the surface of said second substrate,

37 wherein images are formed by image-wise exposing  
38 said coating to actinic radiation, and rupturing  
39 capsules in the image areas with said coating in facial  
40 contact with said developer sheet such that said  
41 internal phase is image-wise released from said ruptured  
42 capsules and there is image-wise transfer of said  
43 chromogenic material to said developer sheet and a  
44 patterned image-forming reaction occurs between said  
45 chromogenic material and said developer material,

46 (b) developing the image-wise exposed developer  
47 sheet to form an image,

48 (c) positioning the front surface of the developed  
49 developer sheet or positioning the undeveloped developer  
50 sheet prior to development against a receptor element,  
51 said developed developer sheet or undeveloped developer  
52 sheet containing the transfer layer of the invention,

53 (d) hand ironing the rear surface of the developed  
54 or undeveloped developer sheet to transfer the developed  
55 image and non-image area to the receptor element,

56 (e) peeling away the developer sheet to obtain an  
57 imaged receptor element,

58 (f) placing a tack-free overlay sheet over the  
59 imaged receptor element, and

60 (g) pressing the overlay sheet by hand ironing to  
61 drive the coating into the receptor element.

1 16. The method of claim 1, which comprises the  
2 following steps:

3 (a) exposing image-wise an imaging material  
4 comprising a support having a front and rear surface, a  
5 transfer coating on said front surface of the support  
6 comprising a material capable of holding developed image  
7 and non-image areas that can be transferred to a  
8 receptor surface upon the application of heat to the  
9 rear surface of the support, said transfer coating layer  
10 capable of stripping from said front surface of the  
11 support and adhering to said receptor surface by

12     liquefying and releasing from said support when heated  
13     and resolidifying within and around fibers of said  
14     receptor surface when heat is removed, said resolidified  
15     liquid coating seals the transferred image and non-image  
16     areas to the receptor surface rendering the transferred  
17     image washproof or wash resistant, and a layer of  
18     photosensitive microparticles on one surface of said  
19     support, said microparticles including an image-forming  
20     agent and a photosensitive composition containing a  
21     polymer which is capable of undergoing cationically  
22     initiated depolymerization and photoinitiator including  
23     a silver halide and an organo silver salt, wherein,  
24     after exposing said microparticle to radiation, said  
25     microparticles, directly or with additional processing,  
26     release said image-forming agent or become permeable to  
27     a developer which reacts with said image-forming agent  
28     to form a visible image,

29             (b) developing the image-wise exposed imaging  
30     material to form an image,

31             (c) positioning the front surface of the developed  
32     imaging material or positioning the undeveloped imaging  
33     material prior to development against a receptor  
34     element, said developed imaging material or undeveloped  
35     imaging material containing the transfer layer of the  
36     invention,

37             (d) hand ironing the rear surface of the developed  
38     or undeveloped support of the imaging material to  
39     transfer the developed image and non-image area to the  
40     receptor element,

41             (e) peeling away the support to obtain an imaged  
42     receptor element,

43             (f) placing a tack-free overlay sheet over the  
44     imaged receptor element, and

45             (g) pressing the overlay sheet by hand ironing to  
46     drive the coating into the receptor element.

1           17. The method of claim 1, which comprises the  
2 following steps:

3           (a) exposing image-wise a color imaging system  
4 comprising:

5           an imaging sheet having a front and rear surface,  
6           a transfer coating on said front surface of the  
7 imaging sheet comprising a material capable of holding  
8 developed image and non-image areas that can be  
9 transferred to a receptor surface upon the application  
10 of heat to the rear surface of the imaging sheet, said  
11 transfer coating layer capable of stripping from said  
12 front surface of the support and adhering to said  
13 receptor surface by liquefying and releasing from said  
14 support when heated and resolidifying within and around  
15 fibers of said receptor surface when heat is removed,  
16 said resolidified liquid coating seals the transferred  
17 image and non-image areas to the receptor surface  
18 rendering the transferred image washproof or wash  
19 resistant, and dry developer material carried on said  
20 imaging sheet, or

21           an imaging sheet, a separate image receiving  
22 developer sheet having a front and rear surface and  
23 having said transfer coating and a dry developer  
24 material on said front surface,

25           said imaging sheet having on one surface thereof a  
26 coating and a dry developer material on said front  
27 surface,

28           said imaging sheet having on one surface thereof a  
29 coating comprising a cyan color precursor,

30           a radiation curable photosensitive composition  
31 associated with said cyan color precursor,

32           a magenta color precursor,

33           a radiation curable photosensitive composition  
34 associated with said magenta color precursor,

35           a yellow color precursor, and

36           a radiation curable photosensitive composition  
37 associate with said yellow color precursor,

38           said radiation curable photosensitive compositions  
39   having distinct sensitivities and being encapsulated in  
40   pressure rupturable capsules as an internal phase,  
41           said capsules having discrete capsule walls,  
42           said cyan, magenta and yellow color precursors  
43   being soluble in said associated photosensitive  
44   compositions or solvents for said color precursors being  
45   encapsulated with said associated photosensitive  
46   compositions,  
47           said color precursors being present in said  
48   capsules with said photosensitive compositions or in  
49   said discrete walls;  
50           said imaging system being capable of forming images  
51   by image-wise exposing said imaging sheet to radiation  
52   actinic with respect to said photosensitive  
53   compositions, and rupturing at least said capsules  
54   containing photosensitive compositions unexposed by said  
55   actinic radiation in the presence of said developer  
56   material to form an image by reaction of said color  
57   precursors with said developer material,  
58           (b) developing the image-wise exposed imaging  
59   system to form an image,  
60           (c) positioning the front surface of the developed  
61   imaging system or positioning the undeveloped imaging  
62   system prior to development against a receptor element,  
63   said developed imaging system or undeveloped imaging  
64   system containing the transfer layer of the invention,  
65           (d) hand ironing the rear surface of the developed  
66   or undeveloped imaging system to transfer the developed  
67   image and non-image area to the receptor element,  
68           (e) peeling away a support of the imaging system  
69   to obtain an imaged receptor element,  
70           (f) placing a tack-free overlay sheet over the  
71   imaged receptor element, and  
72           (g) pressing the overlay sheet by hand ironing to  
73   drive the coating into the receptor element.

1           18. The method of claim 1, which comprises the  
2 following steps:

3           (a) exposing image-wise an imaging system having  
4 a front and rear surface, which comprises:

5           a support having a front and rear surface,

6           at least one layer of microcapsules or at least one  
7 layer of microcapsules and developer in the same layer  
8 or at least one layer of microcapsules and developer in  
9 separate layers, on said front surface of the support,  
10 wherein the microcapsules or developer or microcapsules  
11 and developer are dispersed in a carrier which is  
12 capable of transferring and adhering developed image and  
13 non-image areas from said front surface of said support  
14 upon the application of heat energy to the rear surface  
15 of the support, said carrier strips from said front  
16 surface of the support by liquefying and releasing from  
17 said support when heated, said liquefied carrier  
18 providing adherence to a receptor element by flowing  
19 onto said receptor element and solidifying thereon, said  
20 adherence does not require an external adhesive layer,  
21 with the proviso that the carrier is not capable of  
22 reacting to form an image, and when the microcapsules  
23 are present together in the same layer as the carrier,  
24 the carrier has a particle size which is the same as or  
25 smaller than that of the microcapsules, and

26           an optional protective layer of clear  
27 thermoplastic,

28           (b) developing the image-wise exposed imaging  
29 system to form an image,

30           (c) positioning the front surface of the imaging  
31 system or positioning the undeveloped imaging system  
32 prior to development against a receptor element, said  
33 developed element or undeveloped imaging system  
34 containing the transfer layer of the invention,

35           (d) hand ironing the rear surface of the developed  
36 or undeveloped imaging system to transfer the developed  
37 image and non-image area to the receptor element,

- 38 (e) peeling away the support to obtain an imaged  
39 receptor element,  
40 (f) placing a tack-free overlay sheet over the  
41 imaged receptor element, and  
42 (g) pressing the overlay sheet by hand ironing to  
43 drive the coating into the receptor element.

- 1 19. The method of claim 1, which comprises the  
2 following steps:  
3 (a) exposing image-wise an imaging system having  
4 front and rear surfaces, which comprises:  
5 a support having a front and rear surface,  
6 at least one layer of microcapsules on said front  
7 surface of the support, wherein the microcapsules are  
8 dispersed in a carrier which is capable of transferring  
9 and adhering developed image and non-image areas from  
10 said front surface of said support upon the application  
11 of heat energy to the rear surface of the support, said  
12 carrier strips from said front surface of the support by  
13 liquefying and releasing from said support when heated,  
14 said liquefied carrier providing adherence to a receptor  
15 element by flowing onto said receptor element and  
16 solidifying thereon, said adherence does not require an  
17 external adhesive layer, with the proviso that the  
18 carrier is not capable of reacting to form an image, and  
19 when the microcapsules are present together in the same  
20 layer as the carrier, the carrier has a particle size  
21 which is the same as or smaller than that of the  
22 microcapsules, and  
23 an optional protective layer of clear  
24 thermoplastic,  
25 (b) developing the image-wise exposed element to  
26 form an image,  
27 (c) positioning the front surface of the developed  
28 imaging system or positioning the undeveloped imaging  
29 system prior to development against a receptor element,



30 said developed imaging system or undeveloped imaging  
31 system containing the transfer layer of the invention,  
32 (d) hand ironing the rear surface of the developed  
33 or undeveloped imaging system to transfer the developed  
34 image and non-image area to the receptor element,  
35 (e) peeling away the support to obtain an imaged  
36 receptor element,  
37 (f) placing a tack-free overlay sheet over the  
38 imaged receptor element, and  
39 (g) pressing the overlay sheet by hand ironing to  
40 drive the coating into the receptor element.

1 20. The method of claim 1, which comprises the  
2 following steps:  
3 (a) exposing image-wise an imaging system having  
4 front and rear surfaces, which comprises:  
5 a support having a front and rear surface,  
6 at least one layer of microcapsules and developer  
7 in the same layer on said front surface of the support,  
8 wherein the microcapsules and developer are dispersed in  
9 a carrier which is capable of transferring and adhering  
10 developed image and non-image areas from said front  
11 surface of said support upon the application of heat  
12 energy to the rear surface of the support, said carrier  
13 strips from said front surface of the support by  
14 liquefying and releasing from said support when heated,  
15 said liquefied carrier providing adherence to a receptor  
16 element by flowing onto said receptor element and  
17 solidifying thereon, said adherence does not require an  
18 external adhesive layer, with the proviso that the  
19 carrier is not capable of reacting to form an image, and  
20 when the microcapsules are present together in the same  
21 layer as the carrier, the carrier has a particle size  
22 which is the same or smaller than that of the  
23 microcapsules,  
24 an optional protective layer of clear  
25 thermoplastic,

26 (b) developing the image-wise exposed imaging  
27 system to form an image,

28 (c) positioning the front surface of the developed  
29 imaging system or positioning the undeveloped imaging  
30 system prior to development against a receptor element,  
31 said developed element or undeveloped imaging system  
32 containing the transfer layer of the invention,

33 (d) hand ironing the rear surface of the developed  
34 or undeveloped imaging system to transfer the developed  
35 image and non-image area to the receptor element,

36 (e) peeling away the support to obtain an imaged  
37 receptor element,

38 (f) placing a tack-free overlay sheet over the  
39 imaged receptor element, and

40 (g) pressing the overlay sheet by hand ironing to  
41 drive the coating into the receptor element.

1 21. The method of claim 1, which comprises the  
2 following steps:

3 (a) exposing image-wise an imaging system having  
4 front and rear surfaces comprising (i) an imaging sheet  
5 and developer material carried on said imaging sheet, or  
6 (ii) an imaging sheet and a developer carried on a  
7 separate developer sheet, the imaging sheet having a  
8 layer of an encapsulated radiation curable  
9 photosensitive composition, said imaging system capable  
10 of forming images by image-wise exposing said imaging  
11 sheet to radiation actinic with respect to said  
12 photosensitive composition, and rupturing or dissolving  
13 capsules in the presence of said developer material to  
14 form an image, wherein at least one layer of  
15 microcapsules or at least one layer of microcapsules and  
16 developer in the same layer, or at least one layer of  
17 microcapsules and developer in separate layers, on said  
18 front surface of the support, wherein the microcapsules  
19 or developer or microcapsules and developer are  
20 dispersed in a carrier which is capable of transferring

21 and adhering developed image and non-image areas from  
22 said front surface of said support upon the application  
23 of heat energy to the rear surface of the support, said  
24 carrier strips from said front surface of the support by  
25 liquefying and releasing from said support when heated,  
26 said liquefied carrier providing adherence to a receptor  
27 element by flowing onto said receptor element and  
28 solidifying thereon, said adherence does not require an  
29 external adhesive layer, with the proviso that the  
30 carrier is not capable of reacting to form an image, and  
31 when the microcapsules are present together in the same  
32 layer as the carrier, the carrier has a particle size  
33 which is the same as or smaller than that of the  
34 microcapsules,

35 (b) developing the image-wise exposed imaging  
36 system to form an image,

37 (c) positioning the front surface of the developed  
38 imaging system or positioning the undeveloped imaging  
39 system prior to development against a receptor element,  
40 said developed element or undeveloped imaging system  
41 containing the transfer layer of the invention,

42 (d) hand ironing the rear surface of the developed  
43 or undeveloped imaging system to transfer the developed  
44 image and non-image area to the receptor element,

45 (e) peeling away a support for the imaging system  
46 to obtain an imaged receptor element,

47 (f) placing a tack-free overlay sheet over the  
48 imaged receptor element, and

49 (g) pressing the overlay sheet by hand ironing to  
50 drive the coating into the receptor element.

1 22. The method of claim 1, which comprises the  
2 following steps:

3 (a) exposing image-wise an imaging material having  
4 front and rear surface comprising a support having a  
5 front and rear surface, and a layer of photosensitive  
6 microparticles on one surface of said support, wherein

7 the microparticles are dispersed in a carrier which is  
8 capable of transferring and adhering developed image and  
9 non-image areas from said front surface of said support  
10 upon the application of heat energy to the rear surface  
11 of the support, said carrier strips from said front  
12 surface of the support by liquefying and releasing from  
13 said support when heated, said liquefied carrier  
14 providing adherence to a receptor element by flowing  
15 onto said receptor element and solidifying thereon, said  
16 adherence does not require an external adhesive layer,  
17 with the proviso that the carrier is not capable of  
18 reacting to form an image, and when the microcapsules  
19 are present together in the same layer as the carrier,  
20 the carrier has a particle size which is the same as or  
21 smaller than that of the microcapsules, said  
22 microparticles including an image-forming agent and a  
23 photosensitive composition containing a polymer which  
24 is capable of undergoing cationically-initiated  
25 depolymerization and photoinitiator including a silver  
26 halide and an organo silver salt, wherein, after  
27 exposing said microparticle to radiation, said  
28 microparticles, directly or with additional processing,  
29 release said image-forming agent or become permeable to  
30 a developer which reacts with said image-forming agent  
31 to form a visible image,

32 (b) developing the image-wise exposed imaging  
33 material to form an image,

34 (c) positioning the front surface of the developed  
35 imaging material or positioning the undeveloped imaging  
36 material prior to development against a receptor  
37 element, said developed element or undeveloped imaging  
38 material containing the transfer layer of the invention,

39 (d) hand ironing the rear surface of the developed  
40 or undeveloped imaging material to transfer the  
41 developed image and non-image area to the receptor  
42 element,

- 43           (e) peeling away the support to obtain an imaged  
44 receptor element,  
45           (f) placing a tack-free overlay sheet over the  
46 imaged receptor element, and  
47           (g) pressing the overlay sheet by hand ironing to  
48 drive the coating into the fabric.

1           23. The method of claim 1, which comprises the  
2 following steps:

3           (a) exposing imagewise an imaging system having  
4 front and rear surfaces which comprises, a support  
5 having a front and rear surface, at least one layer of  
6 microcapsules, or at least one layer of microcapsules  
7 and developer in the same layer, or at least one layer  
8 of microcapsules and developer in separate layers, on  
9 said front surface of the support, wherein said  
10 microcapsules, or developer or both are dispersed in the  
11 carrier of the invention, said carrier preferably having  
12 a melting point of at least 100°C, and which is capable  
13 of transferring and adhering developed image and non-  
14 image areas from said front surface of said support upon  
15 the application of heat energy to the rear surface of  
16 the support, said carrier strips from said front surface  
17 of the support by liquefying and releasing from said  
18 support when heated, said liquefied carrier providing  
19 adherence to a receptor element by flowing onto said  
20 receptor element and solidifying thereon, said adherence  
21 does not require an external adhesive layer and occurs  
22 in an area at least coextensive with the area of said  
23 microcapsules, with the proviso that the carrier is not  
24 capable of reacting to form an image, and an optional  
25 layer of clear thermoplastic material;

26           (b) developing the imagewise exposed imaging  
27 system to form an image,

28           (c) positioning the front surface of said  
29 developed imaging system, or positioning the undeveloped

30 element prior to development, against said receptor  
31 element,

32 (d) hand ironing the rear surface of the imaging  
33 system to transfer the developed image and nonimage area  
34 to said receptor element,

35 (e) peeling away the support to obtain an imaged  
36 receptor element,

37 (f) placing a tack-free overlay sheet over the  
38 imaged receptor element, and

39 (g) pressing the overlay sheet by hand ironing to  
40 drive the coating into the fabric.

1 24. The method of claim 1, which comprises the  
2 following steps:

3 (a) generating an image on an obverse surface of  
4 a transfer sheet, said transfer sheet including a  
5 substrate, a first coating on said substrate of material  
6 transferable from said substrate to a receptor surface  
7 by the application of heat or pressure thereto, and a  
8 second coating on said first coating, said second  
9 coating consisting essentially of a mixture of Singapore  
10 Dammar resin and abrasive particles to form an abrasive  
11 surface for increasing the receptivity of the transfer  
12 sheet;

13 (b) positioning that obverse surface of said  
14 transfer sheet against said receptor element,

15 (c) applying energy to the rear of said transfer  
16 sheet to transfer said image to said receptor element,

17 (d) peeling away the substrate to obtain an imaged  
18 receptor element,

19 (e) placing a tack-free overlay sheet over the  
20 imaged receptor element, and

21 (f) pressing the overlay sheet by hand ironing to  
22 drive the coating into the receptor element.

1           25. The method of claim 1, which comprises the  
2 following steps:

3           (a) generating an image on an obverse surface of  
4 a transfer sheet, said transfer sheet including a  
5 substrate, a first coating on said substrate of material  
6 transferable from said substrate to a receptor surface  
7 by the application of heat or pressure thereto, and a  
8 second coating on said first coating, said second  
9 coating consisting essentially of a mixture of resin and  
10 sugar granules to form an abrasive surface for  
11 increasing the receptivity of the transfer sheet;

12           (b) positioning that obverse surface of said  
13 transfer sheet against said receptor element,

14           (c) hand ironing the rear of said transfer sheet  
15 to transfer said image to said receptor element,

16           (d) peeling away the substrate to obtain an imaged  
17 receptor element,

18           (e) placing a tack-free overlay sheet over the  
19 imaged receptor element, and

20           (f) pressing the overlay sheet by hand ironing to  
21 drive the coating into the receptor element.

1           26. The method of claim 1, which comprises the  
2 following steps:

3           (a) electronically generating an image,

4           (b) electronically transferring said image to a  
5 printer,

6           (c) printing said image with the aid of said  
7 printer on an obverse surface of a transfer sheet, said  
8 transfer sheet including a substrate, a first coating on  
9 said substrate of material transferable from said  
10 substrate to a receptor surface by the application of  
11 heat or pressure thereto, and a second coating on said  
12 first coating, said second coating comprising Singapore  
13 Dammar resin;

14           (d) positioning that obverse surface of said  
15 transfer sheet against said receptor element,

- 16 (e) hand ironing the rear of said transfer sheet  
17 to transfer said image to said receptor element,  
18 (f) peeling away the substrate to obtain an imaged  
19 receptor element,  
20 (g) placing a tack-free overlay sheet over the  
21 imaged receptor element, and  
22 (h) pressing the overlay sheet by hand ironing to  
23 drive the coating into the receptor element.

1 27. The method of claim 1, wherein the imaged  
2 transfer material is imaged with a laser copier or laser  
3 printer.

1 28. The method of claim 3, wherein the imaged  
2 transfer material is an imaged developer or receiver  
3 sheet.

1 29. A method for applying an image to a receptor  
2 element, which comprises the steps of:  
3 (i) hand ironing an imaged transfer material  
4 comprising a support sheet having a front surface and a  
5 rear surface and a transfer coating to a receptor  
6 element having valleys on the surface thereof, wherein  
7 said transfer coating is both a release layer and an  
8 adhesive layer, said transfer coating is capable of  
9 transferring and adhering image and non-image areas from  
10 said front surface of said support upon the application  
11 of heat energy to the rear surface of the support, said  
12 transfer coating strips from said front surface of the  
13 support by liquefying and releasing from said support  
14 when heated, said liquefied carrier providing adherence  
15 to a receptor element by flowing onto said receptor  
16 element and solidifying thereon, said adherence does not  
17 require an external adhesive layer, said adhesion is  
18 across the surface of the receptor element and the  
19 adhesion is due to the transfer coating,



20           (ii) peeling away the support sheet to obtain an  
21 imaged receptor element such that said support is  
22 released in the absence of water,

23           (iii) placing a non-stick sheet over the imaged  
24 receptor element, and

25           (iv) pressing the non-stick sheet with a hand iron  
26 in order to press the transfer coating into the valleys  
27 of the receptor element.

1           30. A kit comprising, at least one transfer sheet  
2 and instructions for transferring an image from the  
3 transfer sheet to a receptor element using said transfer  
4 sheet, said instructions comprising steps (i)-(iv)  
5 recited in claim 1.

1           31. The method of claim 1, which comprises the  
2 steps of (i) hand ironing an imaged color laser copier  
3 or color laser printer transfer material having a  
4 support sheet and a transfer coating to a fabric having  
5 valleys on the surface of the fabric, (ii) peeling away  
6 the support sheet to obtain an imaged fabric, (iii)  
7 placing a silicone sheet over the imaged fabric, and  
8 (iv) pressing the silicone sheet by hand ironing to  
9 drive the coating into the valleys of the fabric.

1           32. A method of restoration of an imaged element,  
2 which comprises the steps of:

3           placing a stick resistant overlay sheet over an  
4 imaged element having valleys or pores on the surface  
5 thereof, and

6           pressing the stick resistant overlay sheet with a  
7 hand held heated iron in order to re-press a transfer  
8 coating and image into said valleys or pores of the  
9 imaged element so as to restore the clarity of the image  
10 on the imaged element and to provide a re-condensed  
11 vibrancy of color when present.

1           33. The method of color restoration of the imaged  
2 element of claim 32, wherein the imaged element is a  
3 fabric which is pressed either at the time of transfer  
4 of the image, before laundering to prevent loss of color  
5 vibrancy, or after laundering, said pressing restoring  
6 the color of the image by recompacting the fibers which  
7 may become loose as a result of incomplete transfer or  
8 during laundering.

1           34. The method of claim 32, wherein the imaged  
2 element to be restored contains a color image.

1/1

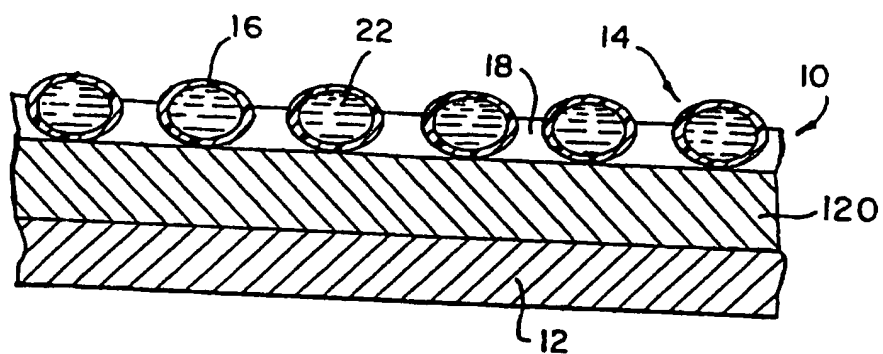


FIG. 1

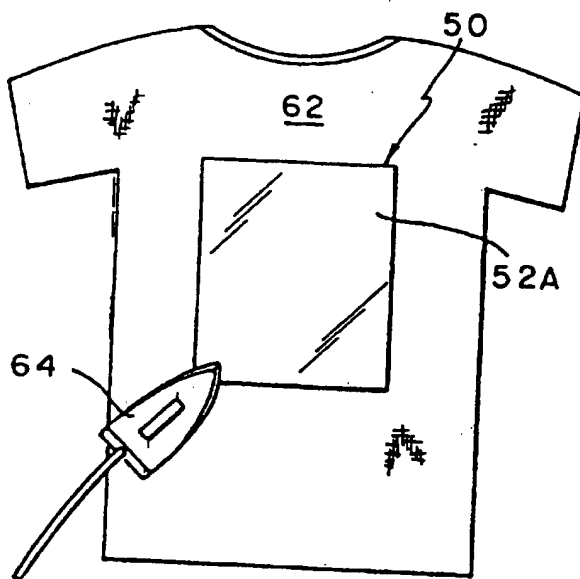


FIG. 2

**PCT**WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau

## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<b>(51) International Patent Classification <sup>6</sup> :</b> <b>B44C 1/17, D06Q 1/12, B41M 5/00</b> <b>G03C 11/12</b>	<b>A3</b>	<b>(11) International Publication Number:</b> <b>WO 97/33763</b> <b>(43) International Publication Date:</b> 18 September 1997 (18.09.97)
<b>(21) International Application Number:</b> PCT/US97/03804 <b>(22) International Filing Date:</b> 13 March 1997 (13.03.97) <b>(30) Priority Data:</b> 60/013,193 13 March 1996 (13.03.96) US <b>(71) Applicant:</b> FOTO-WEAR, INC. [US/US]; 101 Pocono Drive, Milford, PA 18337 (US). <b>(72) Inventor:</b> HARE, Donald, S.; R.R.2, Box 389H, Hawley, PA 18428 (US). <b>(74) Agents:</b> WEINER, Marc, S. et al.; Birch, Stewart, Kolasch & Birch, L.L.P., P.O. Box 747, Falls Church, VA 22040-0747 (US).		<b>(81) Designated States:</b> AL, AM, AT, AU, AZ, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, UZ, VN, ARIPO patent (GH, KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).  <b>Published</b> <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>  <b>(88) Date of publication of the international search report:</b> 13 November 1997 (13.11.97)
<b>(54) Title:</b> APPLICATION TO FABRIC OF HEAT-ACTIVATED TRANSFERS  <b>(57) Abstract</b>  The present invention relates to a method for applying an image to a fabric, which comprises the steps of (i) hand ironing an imaged copier or printer transfer material having a support sheet and a transfer coating to a receptor element having valleys on the surface of the receptor element, (ii) peeling away the support sheet to obtain an imaged receptor element, (iii) placing a tack-free overlay sheet over the imaged receptor element, and (iv) pressing the overlay sheet by hand ironing to drive the coating into the valleys of the receptor element.		

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

# INTERNATIONAL SEARCH REPORT

International Application No.

PCT/US 97/03804

A. CLASSIFICATION OF SUBJECT MATTER  
 IPC 6 B44C1/17 D06Q1/12 B41M5/00 G03C11/12

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 B44C D06Q B41M G03C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 139 917 A (D. HARE) 18 August 1992 cited in the application	1-4, 12-17, 27-31
Y	see the whole document	5-11
X	--- US 5 236 801 A (D. HARE) 17 August 1993 cited in the application	1-4, 18-23, 27-31
	see the whole document	
X	--- US 5 419 944 A (G. L. SAMMIS) 30 May 1995	1,3,4, 29-31
	see column 3, line 10	
X	--- US 4 284 456 A (D. S. HARE) 18 August 1981	1,3,4, 29-31
	see column 2, line 17 - column 5, line 34	
	---	
	-/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

\* Special categories of cited documents:

\*A\* document defining the general state of the art which is not considered to be of particular relevance

\*E\* earlier document but published on or after the international filing date

\*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

\*O\* document referring to an oral disclosure, use, exhibition or other means

\*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\*&\* document member of the same patent family

Date of the actual completion of the international search

17 September 1997

Date of mailing of the international search report

29.09.97

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
 NL - 2280 HV Rijswijk  
 Tel. (+ 31-70) 340-2040, Tx. 31 651 epo nl,  
 Fax (+ 31-70) 340-3016

Authorized officer

Doolan, G

## INTERNATIONAL SEARCH REPORT

International Application No.

PCT/US 97/03804

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	FR 2 690 873 A (J. LESCURE ET AL) 12 November 1993 see page 2, line 10 - page 12, line 10 ---	1,3,4, 29-31
Y	US 5 271 990 A (F. J. KRONZER ET AL) 21 December 1993 cited in the application see column 3, line 36 - column 7, line 49 ---	5,6
Y	US 5 242 739 A (F. J. KRONZER ET AL) 7 September 1993 cited in the application see column 3, line 34 - column 7, line 49 ---	7,8
P,Y	US 5 501 902 A (F. J. KRONZER) 26 March 1996 cited in the application see column 2, line 30 - column 7, line 35 ---	9-11
X	WO 91 03766 A (D. S. HARE) 21 March 1991 see page 2, line 18 - page 7, line 17 ---	12
A	FR 2 452 381 A (LABORATOIRES DE PHYSICO-CHIMIE APPLIQUEE ISSEC) 24 October 1980 see page 2, line 26 - page 8, line 5 ---	12
A	US 4 715 914 A (L. VINER) 29 December 1987 see column 1, line 40 - column 4, line 6 ---	32
A	EP 0 649 753 A (CANON KABUSHIKI KAISHA) 26 April 1995 see column 3, line 34 - column 4, line 36 see column 10, line 50 - column 14, line 56 -----	32-34

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/US 97/03804

**Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)**

This International Search Report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:  
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☐ Claims Nos.:  
because they relate to parts of the International Application that do not comply with the prescribed requirements to such an extent that no meaningful International Search can be carried out, specifically:
3. ☐ Claims Nos.:  
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

**Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)**

This International Searching Authority found multiple inventions in this international application, as follows:

Please see attached sheet!

1. ☐ As all required additional search fees were timely paid by the applicant, this International Search Report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☒ As only some of the required additional search fees were timely paid by the applicant, this International Search Report covers only those claims for which fees were paid, specifically claims Nos.:
  1. Claims 1-4 and 27-31
  2. Claims 5-11
  3. Claims 12-23
  4. Claims 32-34
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this International Search Report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.
- ☒ No protest accompanied the payment of additional search fees.



**FURTHER INFORMATION CONTINUED FROM PCT/ISA/210**

1. Claims: 1-4 and 27-31 Method for applying an image to a receptor element
2. Claims: 5-11 Different method for applying an image to a receptor element
3. Claims: 12-23 Another different method for applying an image to a receptor element
4. Claims 24-26 Another different method for applying an image to a recetor element
5. Claims 32-34 Method of restoration of an imaged element

# INTERNATIONAL SEARCH REPORT

Information on patent family members

Intern. Application No

PCT/US 97/03804

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5139917 A	18-08-92	US 5236801 A	17-08-93
US 5236801 A	17-08-93	US 5139917 A	18-08-92
US 5419944 A	30-05-95	NONE	
US 4284456 A	18-08-81	US 4224358 A	23-09-80
		AT 1202 T	15-07-82
		CA 1108665 A	08-09-81
		EP 0010319 A	30-04-80
		JP 55097956 A	25-07-80
FR 2690873 A	12-11-93	NONE	
US 5271990 A	21-12-93	CA 2070731 A	26-04-93
US 5242739 A	07-09-93	CA 2070730 A	26-04-93
US 5501902 A	26-03-96	CA 2145891 A	29-12-95
WO 9103766 A	21-03-91	AU 6434290 A	08-04-91
		CA 2065738 A	12-03-91
		EP 0491807 A	01-07-92
		JP 5503587 T	10-06-93
		US 5620548 A	15-04-97
FR 2452381 A	24-10-80	NONE	
US 4715914 A	29-12-87	NONE	
EP 649753 A	26-04-95	JP 7145576 A	06-06-95